



GLOBAL JOURNAL OF COMPUTER SCIENCE AND TECHNOLOGY
NETWORK, WEB & SECURITY

Volume 12 Issue 17 Version 1.0 Year 2012

Type: Double Blind Peer Reviewed International Research Journal

Publisher: Global Journals Inc. (USA)

Online ISSN: 0975-4172 & Print ISSN: 0975-4350

Transmission Control Protocol over Wireless LAN

By Dr. Gagandeep Singh Barar & Dr. G.N. Singh

Panjab University, Chandigarh

Abstract - 802.11 standards based WLAN is one very successful technology in commerce. Huge number of WLAN has been deployed across the world. It's very worthwhile to investigate link characteristics of WLAN and its effects to upper layers, especially TCP protocol which is used by numerous network applications. The 802.11 standard is firstly introduced in this section.

GJCST-E Classification : C.2.1



TRANSMISSION CONTROL PROTOCOL OVER WIRELESS LAN

Strictly as per the compliance and regulations of:



RESEARCH | DIVERSITY | ETHICS

Transmission Control Protocol over Wireless LAN

Dr. Gagandeep Singh Barar^a & Dr. G.N. Singh^σ

I. INTRODUCTION

802.11 standards based WLAN is one very successful technology in commerce. Huge number of WLAN has been deployed across the world. It's very worthwhile to investigate link characteristics of WLAN and its effects to upper layers, especially TCP protocol which is used by numerous network applications. The 802.11 standard is firstly introduced in this section.

II. 802.11 STANDARD OVERVIEW

The 802.11 standard is approved by **LAN MAN Standards Committee of the IEEE Computer Society** for LAN over wireless medium. This standard is part of a family of standards for local and metropolitan area networks. Figure 1 depicts the whole standards family.

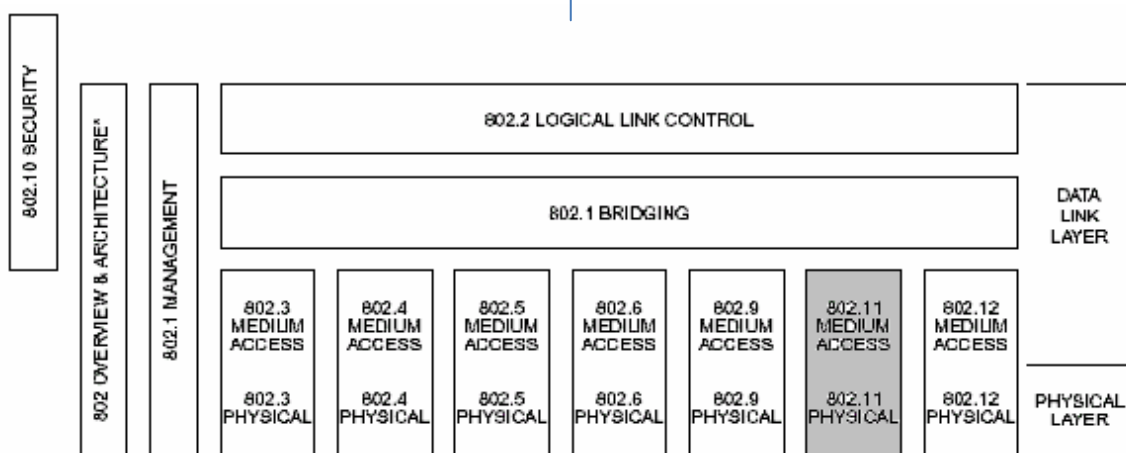


Figure 1 : Protocol Architecture of 802 Standard Family

The 802.11 standard includes a series of specifications which standardize MAC and Physical Layer of WLAN. This standard includes several different Physical Layers (802.11, 802.11b, 802.11a, 802.11g); but these Physical Layers use the same MAC layer. The following figure gives one overview of specifications of the 802.11 standard.

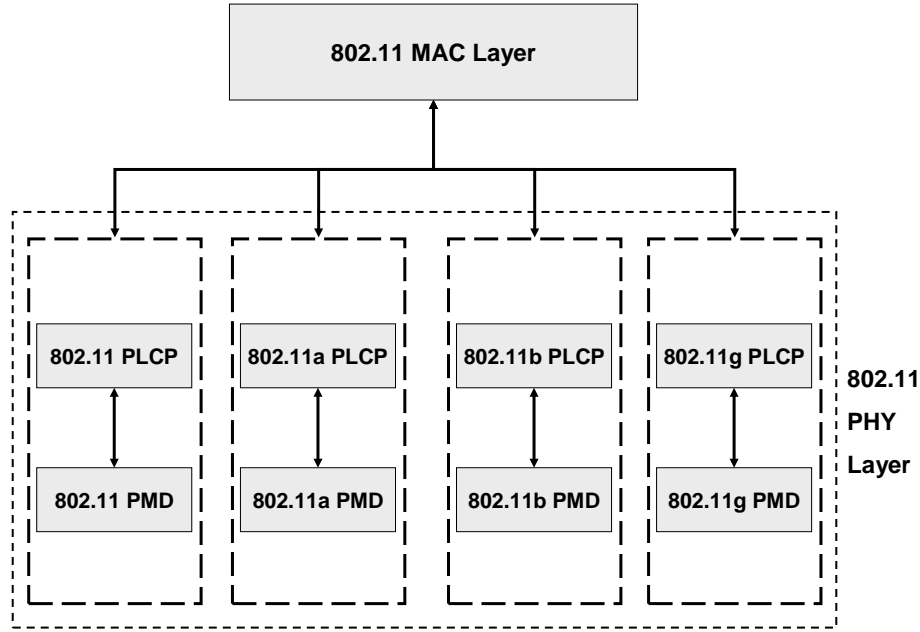


Figure 2 : The 802.11 Standard

Each physical layer includes two sub-layers, PLCP and PMD. PLCP is one convergence procedure to map MAC PDU into a frame format designed for radio transceiver of corresponding PMD layer. PMD layer

interacts with PLCP layer and provides the actual means to transmit data on medium. The following table summarizes the technical details of different PMD sub-layers of 802.11.

Table 1 : PMD details of 802.11

	802.11	802.11b	802.11a	802.11g
Frequency	2.4G	2.4G	5G	2.4G
PHY	FHSS, DSSS,IR	DSSS	OFDM	OFDM
Data Rate (Mbps)	DSSS: 1, 2 FHSS: 0.5-4.5 IR: 1, 2	1, 2, 5.5, 11	6, 9, 12, 18, 24, 36, 48, 54	...20, ..., 54
Channel	4	4	8	4

*IR physical layer is seldom used in practice. The deployment based on original 802.11 is being substituted by 802.11b, 802.11a, 802.11g. WLAN based on 802.11b dominates the currently WLAN deployment.

The factors of the 802.11 standard which affects link characteristics will be described in the following sub-sections, such as network architecture, medium access method, etc.

III. NETWORK ARCHITECTURE

BSS (Basic Service Set) is the basic building block of 802.11 LAN. It includes two or more mobile stations which can directly communicate with each other through wireless medium.

One DS (Distribute System) can be used to interconnect multiple BSSs. In this situation, Each BSS has one special station---AP (Access Point). In addition

to act as one station, AP also provides access to DS for other stations in this BSS.

The DS and BSSs allow IEEE 802.11 to create a wireless network of arbitrary size and complexity. IEEE 802.11 refers to this type of network as the ESS (Extended Service Set) network. It is usually called as Infrastructure Network. The following figure illustrates the simplest ESS network.

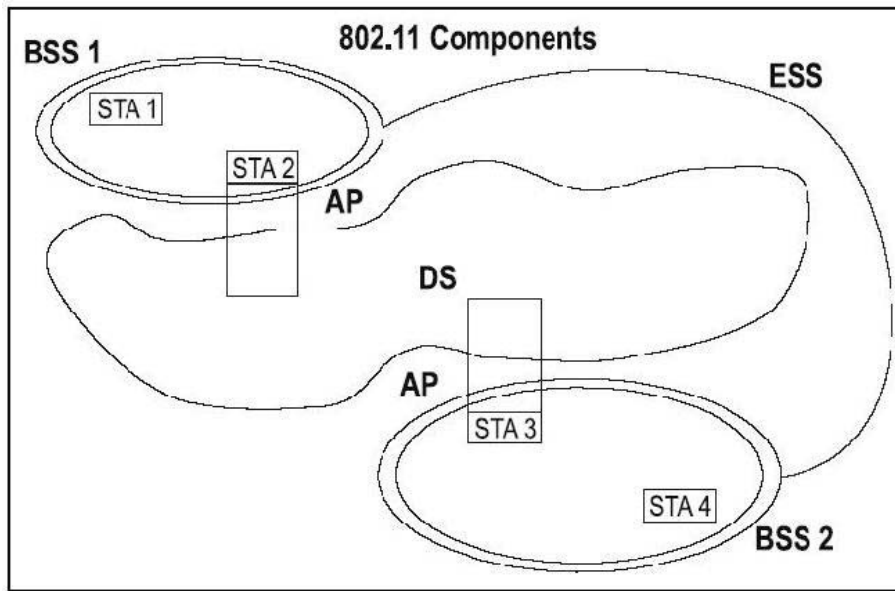


Figure 3 : 802.11 Infrastructure Network (ESS)

DS in ESS normally connects with Internet or other wired networks. In this way, mobile station can access Internet or other network by WLAN.

There is another network type in 802.11, Ad hoc Network. In ad hoc network, there is no DS. There is just one independent BSS and there is no station act as AP. Stations in ad hoc network communicate with each other directly or relaying by intermediate stations.

WLANs with different network architectures own very different link characteristics. The next section will describe how the two network types affect link characteristics in detail.

IV. DCF AND PCF

The different physical layers of 802.11 use the same MAC layer. MAC layer of 802.11 uses one CSMA/CA protocol. It does not use Collision Detection of 802.2 because the transmitter cannot detect collision in wireless medium.

The basic medium access method of 802.11 MAC is a DCF (Distributed Coordination Function). Its simple operation mode uses two-way handshaking (DATA-ACK). The following figure gives one simple example.

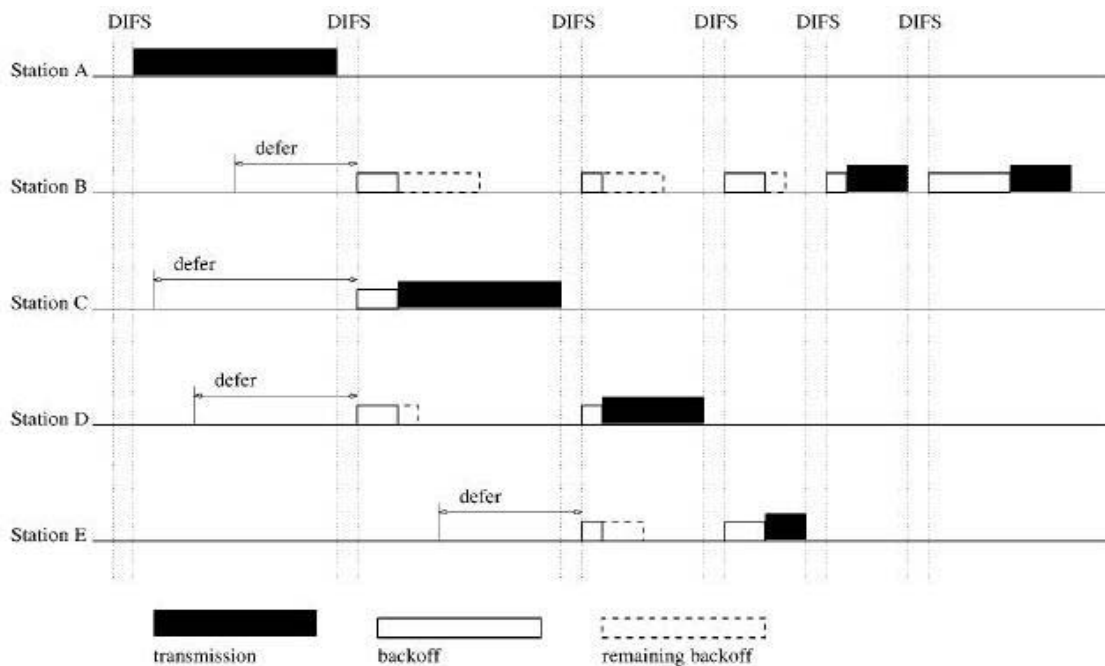


Figure 4 : Basic Access of MAC protocol

To send a packet, a station X first listens to the channel for time T_{DIFS} . If there is silence for T_{DIFS} , X proceeds with the transmission (e.g., station A in figure 4); otherwise, X waits for the first TDIFS of silence after the current busy period, then backs off for a random interval (e.g., station C in figure 4). For each packet, X initializes a contention window size W to be W_{min} . X sets a timer to a random integer uniformly distributed over $0, 1 \dots W$, and decrements it after every T_{slot} period of silence, but suspends it if another station Y begins transmission – this suspension spans the acknowledgment as well (see below); when the timer reaches 0, X begins transmission of its packet (e.g., stations B, D and E in figure 4). Time is thus discretized by T_{slot} to support back-off timers, and a transmission typically occupies multiple slots. The packet is transmitted in its entirety, even if there is a collision, since X does not do collision detection.

The receiver uses the CRC bits in each packet to check for collisions and, if no error is detected, sends an ACK (acknowledgment) after time T_{SIFS} (SIFS is short inter-frame space; $T_{SIFS} < T_{DIFS}$). If the sender does not detect an ACK within an ACK-timeout, it enters a **retransmit back-off**: if W is smaller than the maximum window size W_{max} ($W = 2^m * W_{min}$, m is the number of retransmission attempts), then W is doubled; X sets a timer to a value uniformly chosen from less than the new W , and retransmitted when this timer expires just as before. If retransmission time exceeds d , the packet is thrown away and new packet will be transmitted. Finally, a station must separate two consecutive packets by a random back-off, even if the channel is idle for DIFS after the first transmission (e.g., station B in figure 4.)

In the basic mode of DCF, back off is designed to avoid contention. The contention window size affects MAC layer's throughput. If it's too small, too many collisions happen; otherwise, stations idle for too much time and bandwidth is wasted. The contention window size also affects RTT of wireless link seen by upper layer.

In DCF, RTS/CTS is adopted to solve hidden station problem and to alleviate effects of possible collisions. RTS and CTS is short control message. They are used to acquire the channel for a period time by one station; other stations update their NAV (Network allocation Vector) according to received RTS/CTS and do not transmit frames in these periods. Thus only RTS/CTS may collide with each other; the adverse effect is much less than collisions among long data packets.

AP can also use PCF based on DCF as the medium access method. The PCF provides contention-free frame transmission. The AP use Beacon frame which contains one DTIM element to begin one CFP (Contention-Free Period) and other stations update their NAV according information in beacon frame. In this period, AP polls other stations and other stations can not initiate data transmission. AP can send frame to

other stations and if the station which is polled has packets to transmit, the station will transfer frame. The following figure is one example for frame transmission in PCF.

REFERENCES RÉFÉRENCES REFERENCIAS

1. IEEE Standard, Wireless LAN medium access control (MAC) and physical layer (PHY) specifications, IEEE P802.11, 1999
2. IEEE Standard, Wireless LAN medium access control (MAC) and physical layer (PHY) specifications---high-speed physical layer in the 5 GHz band, IEEE P802.11, 1999
3. IEEE Standard, Wireless LAN medium access control (MAC) and physical layer (PHY) specifications---higher-speed physical layer extension in the 2.4GHz band, IEEE P802.11, 1999
4. N. Golmie, R.E. Van Dyck, A. Soltanian, A. Tonnerre and O. Rebala, "Interference Evaluation of Bluetooth and IEEE 802.11b Systems", *Wireless Networks*, V9, pp201-211, 2003
5. Arunesh Mishra, Minho Shin, William Arbaugh, "An Empirical analysis of the IEEE 802.11 MAC Layer Handoff Process", citeseer.nj.nec.com/541775.html
6. Y. Tian, K. Xu, N. Ansari, "TCP in Wireless Environment: Problems and Solution," *IEEE Communications*, vol 43. no.3, 2005.