



Uncertainty and Congestion Elimination in 4G Network Call Admission Control using Interval Type-2 Intuitionistic Fuzzy Logic

By Uduak Umoh, Imo Eyoh, Etebong Isong & Andy Inyang
University of Uyo

Abstract The management and control of the global growth and complex nature of wireless Fourth Generation (4G) Networks elicits the need for Call Admission Control (CAC). However, CAC faces the challenge of network congestion, thereby deteriorating the network Quality of Service (QoS) due to inherent imprecision and uncertainties in the QoS data which leads to difficulties in measuring some objective and constraints of QoS using crisp values. Previous researches have shown the strength of Interval Type-2 Fuzzy Logic System (IT2FLS) in coping adequately with linguistic uncertainties. Intuitionistic fuzzy sets (IFSs) have indicated their ability to further reduce uncertainty by handling conflicting evaluation involving membership (M), non membership (NM) and hesitation. This paper applies the Interval Type-2 Intuitionistic Fuzzy Logic System (IT2IFLS) in solving CAC problem in order to achieve a better QoS in 4G Networks

Keywords: call admission control, quality of service, fourth generation (4G) network, fuzzy logic, intuitionistic, logic.

GJCST-D Classification: I.5.m

Uncertainty and Congestion Elimination in 4G Network Call Admission Control using Interval Type-2 Intuitionistic Fuzzy Logic

Strictly as per the compliance and regulations of:

Uncertainty and Congestion Elimination in 4G Network Call Admission Control using Interval Type-2 Intuitionistic Fuzzy Logic

Uduak Umoh^α, Imo Eyoh^σ, Etebong Isong^ρ & Andy Inyang^ω

Abstract- The management and control of the global growth and complex nature of wireless Fourth Generation (4G) Networks elicits the need for Call Admission Control (CAC). However, CAC faces the challenge of network congestion, thereby deteriorating the network Quality of Service (QoS) due to inherent imprecision and uncertainties in the QoS data which leads to difficulties in measuring some objective and constraints of QoS using crisp values. Previous researches have shown the strength of Interval Type-2 Fuzzy Logic System (IT2FLS) in coping adequately with linguistic uncertainties. Intuitionistic fuzzy sets (IFSs) have indicated their ability to further reduce uncertainty by handling conflicting evaluation involving membership (M), non-membership (NM) and hesitation. This paper applies the Interval Type-2 Intuitionistic Fuzzy Logic System (IT2IFLS) in solving CAC problem in order to achieve a better QoS in 4G Networks. Intuitionistic Inference system, Gaussian membership function and defuzzification are applied to obtain the crisps output. The study also implements Type-1 Fuzzy Logic (T1FL) and IT2FLS for comparison purposes. The experiments are conducted using artificially generated datasets and apply four matrices for performance evaluation. Results of experimental analyses indicate a superior control with IT2IFLS over IT2FLS and T1FLS. The proposed IT2IFLS-CAC also outperforms its counterparts with the same datasets due to the presence of additional degrees of freedom in the MF, NMF and hesitation indexes. Also, increase level of fuzziness in IT2IFLS provides a more accurate and promising approximation compared with IT2FLS and T1FLS in handling CAC control problem. The system is expected to improve the utilization of network resources as well as keeping satisfactory QoS levels.

Keywords: call admission control, quality of service, fourth generation (4G) network, fuzzy logic, intuitionistic, logic.

1. Introduction

In recent years, wireless communication is changing and growing rapidly in the world. Due to its tremendous growth and complex nature, it has been challenging to manage and control the demands and complexities associated with this vast network such as

Fourth Generation (4G) Network. In telecommunications, 4G is the Fourth Generation of cellular wireless standards succeeding 3G and the 2G families of standards [1]. In 2008, the ITU-R organization specified the IMT- Advanced (International Mobile Telecommunications Advanced) requirements for 4G standards, setting peak speed requirements for the 4G service at 100 Mbit/s for high mobility communication (such as trains and cars) and 1Gbit/s for low mobility communication (such as pedestrians and stationary users).

Mobile network users in our society today strive to get the best service there is, and this has caused a migration of users to the 4G network as it provides better and improvement of services when compared to its predecessors. As the demand for better call and data services increases, there are changes and tremendous growth in 4G wireless network communications worldwide which cause the network to become complex and difficult to manage and control. Due to the influx of users on this network, network service providers can only satisfy a limited amount of traffic, thus causing network congestion. Congestion occurs when the network is overwhelmed with more service requests that it can accommodate, thus, causing delays, dropped and blocked calls. Congestion is a big contributing factor in the deterioration of QoS in a network.

In order to control and manage such complex 4G Networks and still maintain good QoS, Call Admission Control (CAC) is necessary. CAC is a mechanism whose main purpose is to decide, at the time of call arrival whether a new call should be admitted. For example, a new call is accepted only if Quality of Service (QoS) constraints are fulfilled without affecting the QoS constraints of the existing calls in the network [2]. However, the CAC faces the challenge of network congestion which is a big contributing factor in the deterioration of QoS in a Network. This is because some objectives and constraints of QoS are often hard to be measured using crisp values due to the inherent imprecision and uncertainties in the QoS data.

Several methods have been used to improve QoS across 4G networks. These methods include Markov models, queuing models and expert systems, [3] [4] [5] [6] [7]. In recent years, the knowledge of fuzzy systems has been employed to solve QoS problems

Author ^α: Department of Computer Science, University of Uyo, P. M. B 1017, Uyo, Akwa Ibom State, Nigeria.

e-mails: uduakumoh@uniuyo.edu.ng, imoeyoh@uniuyo.edu.ng

Author ^ρ: Department of Computer Science, Akwa Ibom State University of Uyo, Ikot Akpaden, Akwa Ibom State, Nigeria.

e-mail: etebongisong@aksu.edu.ng

Author ^ω: Software Developer at Groove Platforms Ltd Lagos.

e-mail: andyeshiet@gmail.com

because of its ability to make decisions from vague and imprecise information [8] [9].

Fuzzy Logic (Type-1 Fuzzy logic) (T1FL) is a form of multivalued logic derived from fuzzy set theory to deal with reasoning that is approximate [10][11]. The five stages involved in the development of a T1FL system are, fuzzy mathematical model, fuzzification of quantities, composition of fuzzy sets, composition of fuzzy relations and defuzzification of quantities. It has been established that T1FLs have had great success in many real-world applications, but research has also shown that there are limitations in the ability of T1FLS to model and minimize the effect of uncertainties due to the fact that its membership grade is itself crisp [12] [13]. The solution to this problem is an extension of the T1FLS to type-2 fuzzy logic systems (T2FLS) by [14].

The T2FLS is derived from type-2 fuzzy set (T2F) which allows us to handle linguistic uncertainties. T2Fs, a fuzzy relation of higher type has been regarded as one way to increase the fuzziness of a relation by increased ability to handle inexact information in a logically correct manner [15]. The T2Fs allow for linguistic grades of membership, assisting in knowledge representation and also offer improvement on inference [16]. The structure of T2FLS is similar to its type-1 counterpart with additional unit called type-reduction. Type-reduction algorithms such as iterative Karnik-Mendel (KM)[17] algorithm, Wu-Mendel algorithm [18], etc can be explored to perform type-reduction.

Generally, because of the computational complexity of using a general T2FLS, an Interval type-2 fuzzy logic (IT2FL) which is quite practical and a special case of T2FS with a manageable computational complexity is designed by [13]. The extended version of type-1 defuzzification operation technique is usually applied on T2FSs case of the IT2FLS to obtain a T1FS at the output. The T1FS so obtained becomes a type-reduced set which is a collection of the outputs of all of the embedded T1FLSs [17]. IT2FLs are complementary fuzzy sets which provide degree of membership (DoM) value of an element in a given set where the degree of non-membership (DoNM) value is equal to one take away the DoM value. However, IT2FLs may not cope adequately with real-life situations because most often human beings are hesitant in specifying about set descriptions in terms of MF and NMF as such fuzzy sets theory may not be appropriate to deal with such problem, and hence IFS theory suffices [19].

Intuitionistic logic was introduced by [20] as logic for Brouwer's intuitionistic mathematics, [21] applied more generally to constructive mathematics (logic). It is mostly described as classical logic without the principle of excluded middle ($\neg A \vee \neg A$) or the double negation rule ($\neg \neg A \vdash A$) [22]. Atanassov [22] extended the concept of Zadeh's fuzzy sets to intuitionistic fuzzy sets (IFSs) as a generalization of fuzzy sets which determines both a DoM and a DoNM in dealing with

uncertainty and vagueness. Fuzzy sets provide DoM of an element in a given set where the DoNM is equal to one take away the DoM, whereas, the intuitionistic fuzzy sets being a higher order fuzzy set can handle both a DoM and a DoNM. The membership function (MF) and non-membership functions (NMF) representation of attributes to handle uncertainty are more or less independent of each other, thus providing a better way to express uncertainty. The presence of non-membership or hesitation index in fuzzy sets gives more allowance to represent imprecision and uncertainty adequately in dealing with many real-world problems [23]. The concept of IFS is extended to interval valued intuitionistic fuzzy sets (IVIFS) as membership and non-membership functions in the interval [0,1] called IT2IFLSs with degrees of membership as intervals can give better result in some applications than the T1FLSs and T2FLS [24] [25] [26] [27] [28]. (the highlighted refs. are not in order and please let the student confirm the rest that they match).

In this paper, we apply an IT2IFLS to model uncertain data for call admission control in 4G networks. It is a type of fuzzy logic controller that incorporates the experience of human experts in making appropriate decisions to handle uncertainty and congestion control in 4G Networks. This paper is motivated by the ability of IT2IFLS to handle imprecision and vagueness more accurately and make better decisions due to its ability to consider membership and non-membership of an element and expert's factor of hesitation.

To the best knowledge of the authors, there is currently no work in the literature where IT2IF set is applied in a fuzzy logic inference system in handling call admission control problem in 4G Networks in order to improve the QoS. Decision is made based on the information in the traffic contract and the condition of the network. T1FL and IT2FL are also implemented for the purpose of comparison. MAD, MAPE, MSE AND RMSE performance measures are applied in order to measure the performance and utilization of the proposed system. The paper employs system analysis and design and object design tools in the development of the system Matlab, IntelliJ, MySQL IntelliJ, MySQL and the java programming language are employed in implementing the system.

The rest of the paper is presented as follows: In section 2, an overview of IFS, T2IFS and IT2IFS are defined. In section 3, IT2IFLS is designed. We present our results in Section 4, and conclude in section 5.

II. Related Work

The related work is concerned about the different researches which deal with CAC in improving QoS in mobile networks and also the different methods and characteristics that are explored in this paper.

Call Admission Control (CAC)

CAC is an important decision making tool which is employed to provide the needed QoS by controlling access to the network resources [29]. Maintaining QoS parameters such as signal quality, packet delay, loss rate, call blocking and dropping thresholds are required for efficient admission control in mobile multimedia networks [30]. The CAC can decide to either accept or block the new request depending on the available network resources and on network load conditions for a needed connection type. Fundamentally, a new request is accepted if the available resources are adequate to meet the QoS requirements for this new connection without violating the QoS of the request that has already been accepted, otherwise the call is rejected. Many researchers have applied several techniques including fuzzy logic to deal with CAC in order to improve QoS across 4G networks.

Mahesh et al., (2014) [2] applied soft computing technique in surveying call admission control in wireless networks. Congestion control mechanism is modeled with fuzzy logic [31]. Shen and Mark [32] proposed a call admission control in wideband CDMA cellular networks by using fuzzy logic. Sonmez et al., [33] studied a fuzzy-based congestion control for wireless multimedia sensor networks. [30], carried out a comparative study of CAC in mobile multimedia networks using soft computing paradigms. Metre et al., [34] surveyed soft computing techniques for Joint Radio Resource Management (JRRM). Mallapur et al., [35] developed a fuzzy based bandwidth allocation scheme for temporary borrowing of bandwidth from existing connections in order to accommodate newly arrival call connections. Chen and Chang [36] designed a fuzzy Q-Learning admission control for WCDMA/WLAN heterogeneous networks with multimedia traffic. Ramesh et al., [37] designed a fuzzy neural model for call admission control in multi class traffic based next generation wireless networks (NGWNs). Lawal et al. [6] carried out a survey on call admission control schemes in LTE Networks where the algorithms are grouped into CAC with Pre-emption, Resource Reservation (RR), Resource Degradation (RD), Delay Awareness (DA) or Channel Awareness (CA). The study further discussed the operational procedure, strengths and weaknesses of each scheme. G. Mali [38] designed a fuzzy based vertical handoff -decision controller for future networks. [39] [40] employed IT2FL to model connection admission control (CAC) in fourth generation (4G) networks to improve quality of service (QoS). The study applied Karnik–Mendel (KM) and Wu-Mendel (WM) algorithms for computing the centroid and to derive inner and outer- bound sets for the type-reduced set of IT2FS. The results indicate that IT2FLS-CAC using WU approach achieves minimal call blocking probability and provides better performance in CAC decision making with IT2FLS-CAC than IT2FLS-CAC using KM and IT1FLS methods.

Interval Type-2 Fuzzy Set (IT2FS)

According to [41], IT2FS, is characterized by,

$$\tilde{A} = \{((x, u), \mu_{\tilde{A}}(x, u)) | \forall x \in X, \forall u \in J_x \subseteq [0, 1] \quad (1)$$

where x is the primary variable with a domain X and $u \in U$ is the secondary variable with domain J_x at each $x \in X$. J_x is the primary membership of x and the secondary grades of all equal 1 [42]. The uncertainty about the union of all the primary memberships is called footprint of uncertainty (FOU) as shown in (2) and Figure 1 respectively.

$$\mu_{\tilde{A}}(x, u) = 1, FOU(\tilde{A}) = \bigcup_{\forall x \in X} J_x = \{(x, u) : u \in J_x \subseteq [0, 1]\} \quad (2)$$

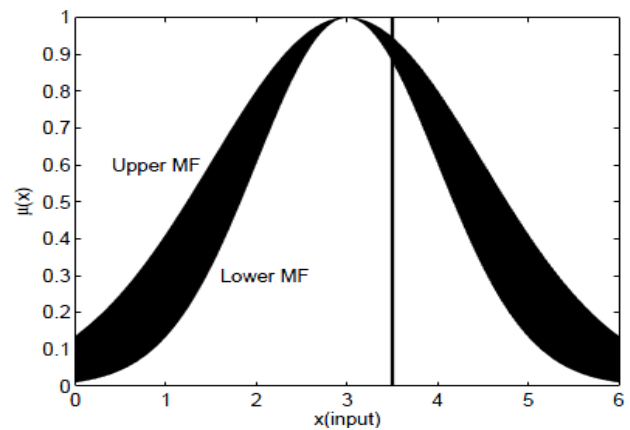


Fig. 1: Interval Type-2 Fuzzy set [41]

Where the upper membership function (UMF) and lower membership functions (LMF) are represented as,

$$UMF = \overline{\mu_{\tilde{A}}}(x) \equiv \overline{FOU(\tilde{A})} \quad \forall x \in X \quad (3)$$

$$LMF = \underline{\mu_{\tilde{A}}}(x) \equiv \underline{FOU(\tilde{A})} \quad \forall x \in X \quad (4)$$

$$J_x = \{(x, u) : u \in [\underline{\mu_{\tilde{A}}}(x), \overline{\mu_{\tilde{A}}}(x)]\} \quad (5)$$

The MFs of IT2FS are twice T1MFs bounded by the FOU in (3) and (4) and J_x is an interval set. The set theory operations of union, intersection and complement are applied to compute IT2FSs.

Type-1 Intuitionistic Fuzzy Set (T1IFS)

Definition 1: According to [22] given a non- empty set , an intuitionist fuzzy set A^* in X is an object having the form:

$$A^* = \{(x, \mu_{A^*}(x), \nu_{A^*}(x)) : x \in X\} \quad (6)$$

where the function $\mu_{A^*}(x) : \rightarrow [0,1]$ defines the degree of membership and $\nu_{A^*}(x) : X \rightarrow [0,1]$ defines the degree of non-membership of element $x \in X$.

Definition 2: for every element, $x \in X$, $0 \leq \mu_{A^*}(x) + \nu_{A^*}(x) \leq 1$ holds. Then

$$\mathcal{V}_{A^*}(x) = 1 - \mu_{A^*}(x) \tag{7}$$

The set A is a fuzzy set [19].

Definition 3: For every common fuzzy subset A on X, intuitionistic fuzzy indexin A* (degree of hesitancy or uncertainty) of the element x in A for every T2IFS is defined as in (8)

$$\pi_{A^*}(x) = 1 - (\mathcal{V}_{A^*}(x) + \mu_{A^*}(x)) \tag{8}$$

Type-2 Intuitionistic Fuzzy Set (T2IFS)

According to [26], a T2IFS is characterized by T2 membership function (MF) and non-membership functions (NMF) of defined as:

$$\mu_{A^*}(x, u) : u \in J_x^\mu \subseteq [0,1] \text{ (MF)} \tag{9}$$

and

$$\mathcal{V}_{A^*}(x, u) : u \in J_x^\nu \subseteq [0, 1] \text{ (NMF)} \tag{10}$$

Where J_x^μ is the primary MF and J_x^ν is the primary NMF of element in (x, u) defined in (11) and (12).

$$J_x^\mu = \{(x, u) : u \in [\underline{\mu}_{A^*}(x), \bar{\mu}_{A^*}(x)]\} \tag{11}$$

$$= J_x^\nu = \{(x, u) : u \in [\underline{\nu}_{A^*}(x), \bar{\nu}_{A^*}(x)]\} \tag{12}$$

$\tilde{A}^* =$

$$\{(x, u) : \bar{\mu}_{A^*}(x, u), \bar{\nu}_{A^*}(x, u), | \forall x \in X, \forall u \in J_x^\mu, \forall u \in J_x^\nu\} \tag{13}$$

Where $0 \leq (\bar{\mu}_{A^*}(x, u)) \leq 1$ and $0 \leq (\bar{\nu}_{A^*}(x, u)) \leq 1$, $\forall u \in J_x^\mu$ and $\forall u \in J_x^\nu$ conforms to $0 \leq \bar{\mu}_{A^*} + \bar{\nu}_{A^*} \leq 1$. When the secondary MFs, $\bar{\mu}_{A^*}(x, u) = 1$, and secondary NMFs, $\bar{\nu}_{A^*}(x, u) = 1$, a T2IFS translates to an IT2IFS as shown in Figure 2. Where, x and u are the primary and secondary variables respectively.

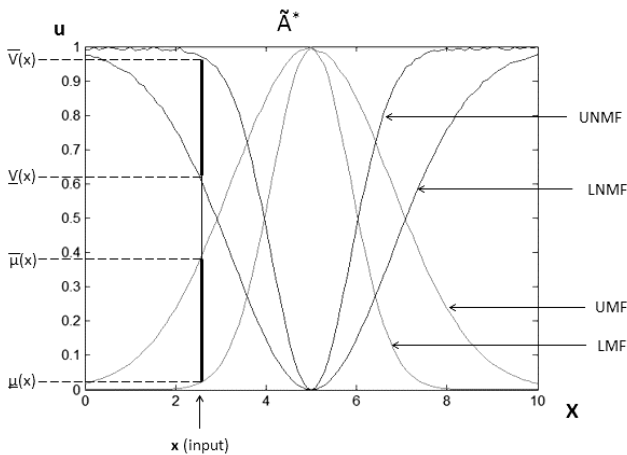


Fig. 2: An IT2 Intuitionistic Gaussian MF and NMF of IT2IFS [26]

Interval Type-2 Intuitionistic Fuzzy Set (IT2IFS)

An IT2IFS, \tilde{A}^* , is characterized by bounding MFs and NMFs respectively where $0 \leq \bar{\mu}_{A^*}(x) + \underline{\nu}_{A^*}(x) \leq 1$ as defined in (14) and (15)[43].

$$\text{IT2 MFs} = \bar{\mu}_{A^*}(x), \underline{\mu}_{A^*}(x) \tag{14}$$

$$\text{IT2 NMFs} = \bar{\nu}_{A^*}(x), \underline{\nu}_{A^*}(x) \tag{15}$$

For each $x \in X$, we have the IF-index or hesitancy degree as an outcome of an expert's uncertainty about the degree of M and NM as defined in [44]. There are two IF-indexes; the center IF-index and variance IF-index as seen in (16 - 18) [45].

$$\pi_c(x) = \max(0, (1 - (\mu_{A^*}(x) + \nu_{A^*}(x)))) \tag{16}$$

$$\bar{\pi}_{var}(x) = \max(0, (1 - (\bar{\mu}_{A^*}(x) + \bar{\nu}_{A^*}(x)))) \tag{17}$$

$$\underline{\pi}_{var}(x) = \max(0, (1 - (\underline{\mu}_{A^*}(x) + \underline{\nu}_{A^*}(x)))) \tag{18}$$

Such that $0 \leq \pi_c(x) \leq 1$ and $0 \leq \pi_{var}(x) \leq 1$

An IT2IFS, is fully bounded by two T1 MFs and two T1 NMFs as upper MF, $\bar{\mu}_{A^*}$ and lower MF, $\underline{\mu}_{A^*}(x)$ (14) and upper NMF, $\bar{\nu}_{A^*}(x)$, and lower NMF, $\underline{\nu}_{A^*}(x)$ (15) which define the footprints of uncertainty (FOUs) of a T2FS. The upper MF is a subset with maximum membership grade of FOU while the lower MF is a subset with minimum membership grade of FOU and both the MF and NMFs of the IT2IFS are combined into M and NM FOUs respectively to handle the uncertainty about IT2IFS as shown in Figure 1 and (19 - 20) as the primary M and NM respectively [26].

$$FOU_\mu(\tilde{A}^*) = U_{\forall x \in X}[\underline{\mu}_{A^*}(x), \bar{\mu}_{A^*}(x)] \tag{19}$$

$$FOU_\nu(\tilde{A}^*) = U_{\forall x \in X}[\underline{\nu}_{A^*}(x), \bar{\nu}_{A^*}(x)] \tag{20}$$

Interval Type-2 Intuitionistic Fuzzy Logic System (IT2IFLS)

The IT2IFLS is the hybridization of IT2FL and Intuitionistic Logic (IL) tools to deal adequately with uncertainty and vagueness associated with real world problem. The structure of IT2IFLS is similar to IT2FL with the following components: intuitionistic fuzzification unit, intuitionistic rule base, intuitionistic fuzzy inference engine and intuitionistic composition/defuzzification processes respectively. Figure 3 gives the structure of IT2IFL which is a modification of the work done in [40].

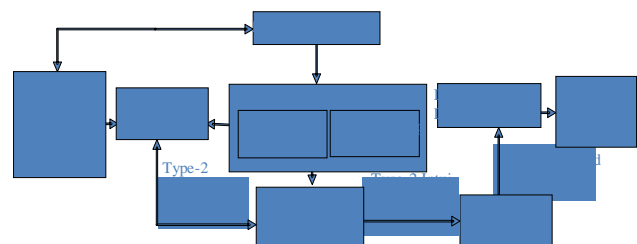


Fig. 3: The structure of IT2IFL [40]

Fuzzification process is carried out by converting intuitionistic fuzzy inputs and fuzzified into input IT2IF sets by mapping a numeric input vector x into an IT2IFS, Here, each element of the MFs and NMFs is assigned membership grade (degree of

membership) in each IT2IFS division. The study considers IT2I Gaussian MF and NMFs with a fixed center (mean) and uncertain width (deviation) because it is suitable for a highly dynamic system and has the advantage of being smooth at all points as define in (21-24) respectively (Eyoh et al, 2017).

$$\bar{\mu}_{ik}(x_i) = \exp\left(-\frac{(x_i - c_{ik})^2}{2\sigma_{2,ik}^2}\right) * (1 - \pi_{c,ik}(x_i)) \quad (21)$$

$$\underline{\mu}_{ik}(x_i) = \exp\left(-\frac{(x_i - c_{ik})^2}{2\sigma_{1,ik}^2}\right) * (1 - \pi_{c,ik}(x_i)) \quad (22)$$

$$\underline{v}_{ik}(x_i) = (1 - \pi_{var,ik}(x_i)) - \underline{\mu}_{ik}(x_i) \quad (23)$$

$$\bar{v}_{ik}(x_i) = (1 - \pi_{var,ik}(x_i)) - \bar{\mu}_{ik}(x_i) \quad (24)$$

Where, $\pi_{c,ik}(x)$ is the IF-index of center and $\pi_{var,ik}$ is the IF-index of variance. The premise parameters, $\bar{\sigma}_{2,ik}$, $\sigma_{1,ik}$ and $\pi_{c,ik}(x)$, $\pi_{var,ik}$ define the M and NM grades of each element of and are combined to give FOUs.

Intuitionistic Fuzzy Rule (IFR)

IT2IFLS Mamdani's fuzzy rule syntax is similar to that of IT2FL rule and is expressed in (25) and (26-27) for both MF and NMFs

$$R_k \text{ IF } x_i \text{ is } \tilde{A} *_{ik} \text{ and, , , and } x_p \text{ is } \tilde{A} *_{pk} \text{ then } y_k \text{ is } \tilde{B} *_{pk} \quad (25)$$

$$R_k^\mu \text{ IF } x_i \text{ is } \tilde{A} *_{ik}^\mu \text{ and, , , and } x_p \text{ is } \tilde{A} *_{pk}^\mu \text{ then } y_k \text{ is } \tilde{B} *_{pk}^\mu \quad (26)$$

$$R_k^v \text{ IF } x_i \text{ is } \tilde{A} *_{ik}^v \text{ and, , , and } x_p \text{ is } \tilde{A} *_{pk}^v \text{ then } y_k \text{ is } \tilde{B} *_{pk}^v \quad (27)$$

Where $\tilde{A} *_{ik}(x)$, ..., $\tilde{A} *_{pk}(x)$ are IT2IFS for $i = 1, \dots, p$ are the antecedents; y is the consequent of the k th rule of IT2IFLS. $\tilde{A} *_{ik}^\mu$ and $\tilde{A} *_{ik}^v$ are the MFs and NMF of the antecedent of IT2IFLS part assigned of the i th input x_i , The $\tilde{B} *_{pk}^\mu$ and $\tilde{B} *_{pk}^v$ are the MFs and NMF of the consequent part assigned to the output MF, y_k^μ and outputs NMFs, y_k^v respectively

Intuitionistic Fuzzy Inference

There are two general fuzzy inference mechanisms based on their characterization and the evaluation of the output. They include; Mamdani and Takagi -Sugeno-Kang (TSK) fuzzy inference engines. The Mamdani fuzzy inference is adopted in this paper because it proves to be more intuitive. In IT2IFLS, Mamdani fuzzy inference approach evaluates the rules in a rule base against IT2IF input set from fuzzification to produce IT2IF output set by the composition of MFs output, and NMFs output. Then the firing strength of the p th rule of the fired M/ and NM values for both the upper and lower bounds are computed (28) and (29-32) respectively.

$$\tilde{F}^k(x') = [\underline{f}_k^\mu(x'), \bar{f}_k^\mu(x'), \underline{f}_k^v(x'), \bar{f}_k^v(x')] \quad (28)$$

$$= [\underline{f}_k^\mu, \bar{f}_k^\mu, \underline{f}_k^v, \bar{f}_k^v] \quad (28)$$

$$\underline{f}_k^\mu = \underline{\mu}_{\tilde{A}_{1k}}(x_1) * \underline{\mu}_{\tilde{A}_{2k}}(x_2) * \dots * \underline{\mu}_{\tilde{A}_{pk}}(x_p) \quad (29)$$

$$\bar{f}_k^\mu = \bar{\mu}_{\tilde{A}_{1k}}(x_1) * \bar{\mu}_{\tilde{A}_{2k}}(x_2) * \dots * \bar{\mu}_{\tilde{A}_{pk}}(x_p) \quad (30)$$

$$\underline{f}_k^v = \underline{v}_{\tilde{A}_{1k}}(x_1) * \underline{v}_{\tilde{A}_{2k}}(x_2) * \dots * \underline{v}_{\tilde{A}_{pk}}(x_p) \quad (31)$$

$$\bar{f}_k^v = \bar{v}_{\tilde{A}_{1k}}(x_1) * \bar{v}_{\tilde{A}_{2k}}(x_2) * \dots * \bar{v}_{\tilde{A}_{pk}}(x_p) \quad (32)$$

Where $\tilde{F}^k(x')$ is the antecedent of k th. $\mu_{\tilde{A}_{pk}}$ and $v_{\tilde{A}_{pk}}$ are the degrees of membership and non-membership for $i = 1, \dots, p$.

Intuitionistic Defuzzification

The crisp output, y is computed using the composition of M and NM outputs. Although there are several techniques available in the literature for the defuzzification of the final crisp output, the study employs TSK method in [45][46] to compute the IT2IFLS final crisp output as presented in (33) and (34) and the M and NM fired strength are evaluated using (34)-(36) respectively.

$$(1 - \beta) \sum_{k=1}^p \tilde{f}_k^\mu y_k^\mu + (1 - \beta) \sum_{k=1}^p \tilde{f}_k^v y_k^v \quad (33)$$

$$y = \frac{(1 - \beta) \sum_{k=1}^p (\underline{f}_k^\mu + \bar{f}_k^\mu) y_k^\mu + \beta \sum_{k=1}^p (\underline{f}_k^v + \bar{f}_k^v) y_k^v}{\sum_{k=1}^p \underline{f}_k^\mu + \sum_{k=1}^p \bar{f}_k^\mu + \sum_{k=1}^p \underline{f}_k^v + \sum_{k=1}^p \bar{f}_k^v} \quad (34)$$

Where,

$$\tilde{f}_k^\mu = \frac{\underline{f}_k^\mu + \bar{f}_k^\mu}{\sum_{k=1}^p \underline{f}_k^\mu + \sum_{k=1}^p \bar{f}_k^\mu} \quad (35)$$

and

$$\tilde{f}_k^v = \frac{(\underline{f}_k^v + \bar{f}_k^v)}{\sum_{k=1}^p \underline{f}_k^v + \sum_{k=1}^p \bar{f}_k^v} \quad (36)$$

The parameter β is a user defined parameter which specifies the contribution of the M and NM values in the final output such that $0 \leq \beta \leq 1$. If $\beta = 0$, the outputs of the IT2IFLS are determined using MF else if $\beta = 1$, only the NM will contribute to the system's output.

III. Research Methodology

Uncertainty and Congestion Elimination in 4G Networks CAC using IT2IFL.

The main goal of this paper is to apply the interval type-2 intuitionistic fuzzy Logic (IT2IFL) in solving call admission control problem in order to achieve a better QoS in 4G Networks. The model of the proposed system is shown in Figure 4 and the components of the system include; knowledge engine (which provides both the structured and unstructured information required by the system), intuitionistic fuzzifier, knowledge base, intuitionistic defuzzifier. The knowledge base processes both the fuzzy rules and the membership functions.

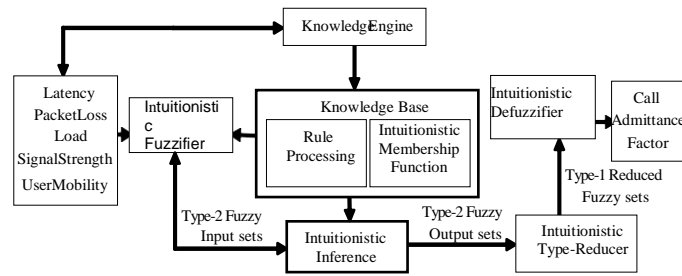


Fig. 4: The IT2IFL- CAC model for Uncertainty and Congestion Elimination in 4G Networks

The IT2IF inference system takes the following five parameters, Latency (LA), Packet Loss (PL), Load (LD), Signal Strength (SS) and User Mobility (UB) as inputs. The system explores the Mamdani inference method [47] for both membership and nonmembership functions evaluation. The intuitionistic fuzzy values of the LA, PL, LD, SS and UB are intuitionistically fuzzified and passed to the intuitionistic fuzzy inference engine where

rules are applied to these values. The output of the inference engine is passed to the output processing unit and finally the defuzzified crisp value (Call Admittance Factor (CAF)) is obtained.

The algorithm for the steps in modeling CAC intuitionistic fuzzy controller is summarized in the Figure 5.

1. Begin
2. IFIS := Create intuitionistic fuzzy inference system
3. Define linguistic values of input variables; LA, PL, LD, SS, UB
4. Define linguistic values of output variable CAF
5. LA_value := Read Latency value
6. PL_value := Read Packet Loss value
7. LD_value := Read Load value
8. SS_value := Read Signal Strength value
9. UB_value := Read User Mobility value
10. [Low Medium High] := Find degree of MF for LA_value
11. [NLow NMedium NHigh] := Find degree of NMF for LA_value
12. [Low Medium High] := Find degree of MF for PL_value
13. [NLow NMedium NHigh] := Find degree of NMF for PL_value
14. [VeryLow Low High VeryHigh] := Find degree of MF for LD
15. [NVeryLow NLow NHigh NVeryHigh] := Find degree of NMF for LD_value
16. [Weak Medium Strong] := Find degree of MF for SS_value
17. [NWeak NMedium NStrong] := Find degree of NMF for SS_value
18. [Low Medium High] := Find degree of MF for UM_value
19. [NLow NMedium NHigh] := Find degree of NMF for UM_value
20. [Poor Fair Good Excellent] := Find degree of MF for UM_value
21. [NPoor NFair NGood NExcellent] := Find degree of NMF for UM_value
22. Compute appropriate intuitionistic fuzzy logic rules to get degree of truth for output variable CAF
23. Apply defuzzification model to get crisp value of Call Admittance Factor (CAF).
24. Show final CAF

Fig. 5: Algorithm for CAC Intuitionistic Fuzzy System

Intuitionistic Fuzzifier - CAC for Uncertainty and Congestion Elimination in 4G Networks

The paper designs an intuitionistic fuzzy - CAC system for elimination of uncertainty and congestion control in 4G Networks for improving QoS. The universe of discourse is defined for our linguistic variables in Table 1. From Figure, 4, firstly, intuitionistic fuzzification is performed on the values of five QoS control input variables, namely: the LA, PL, LD, SS and UB respectively.

Table 1: Fuzzy Inputs Universe of Discourse

Input Variables And Their Universe Of Discourse					
LA(%)	PL	SS (dBm)	LD (%)	UM (m/s)	CAF
[0 , 100]	[0 , 5]	[-100,-80]	[0 , 100]	[0,6	[0 , 1]

Equations 21 – 24 are applied for the Gaussian membership function evaluation for both MF and NMF for all the input and output attributes as presented in sections (a)-(e) respectively. The IT2IFLS IF-index for

center and variance are determined for the five parameters based on (16) – (18) respectively. By putting the values of the five input variables (LA, PL, LD, SS and UB) in the MF and NMFs of LA, PL, LD, SS and UB respectively, we obtain the fuzzified values. Tables 2 - 6 show the matrixes values of MF, NMF and hesitancy for the five input parameters of CAC process respectively. The MF and NMF of the output variable (CAF) of our IT2IFL system is evaluated.

a) Membership and non-membership function for Latency

$$\mu_L(x, [6.5, 4.5], [20.0, 20.0]) = e^{-\frac{1}{2} \left(\frac{x - [20.0, 20.0]}{[6.5, 4.5]} \right)^2} = [\bar{\mu}_{\bar{A}_{im}} \underline{\mu}]$$

$$\mu_L = \underline{\mu}_L \text{ and } v_L = 1 - \bar{\mu}_L$$

$$\mu_M(x, [10.5, 8.5], [50.0, 50.0]) = e^{-\frac{1}{2} \left(\frac{x - [50.0, 50.0]}{[10.5, 8.5]} \right)^2}$$

$$\mu_M = \underline{\mu}_M \text{ and } v_M = 1 - \bar{\mu}_M$$

$$\mu_H(x, [6.5, 4.5], [80.0, 80.0]) = e^{-\frac{1}{2} \left(\frac{x - [80.0, 80.0]}{[6.5, 4.5]} \right)^2}$$

$$\mu_H = \underline{\mu}_H \text{ and } v_H = 1 - \bar{\mu}_H$$

b) Membership and non-membership function for Packet Loss

$$\mu_L(x, [0.8, 0.6], [0.0, 0.0]) = e^{-\frac{1}{2} \left(\frac{x - [0.0, 0.0]}{[0.8, 0.6]} \right)^2}$$

$$\mu_L = \underline{\mu}_L \text{ and } v_L = 1 - \bar{\mu}_L$$

$$\mu_M(x, [0.45, 0.35], [2.5, 2.55]) = e^{-\frac{1}{2} \left(\frac{x - [2.5, 2.55]}{[0.45, 0.35]} \right)^2}$$

$$\mu_M = \underline{\mu}_M \text{ and } v_M = 1 - \bar{\mu}_M$$

$$\mu_H(x, [0.8, 0.6], [5.0, 5.0]) = e^{-\frac{1}{2} \left(\frac{x - [5.0, 5.0]}{[0.8, 0.6]} \right)^2}$$

$$\mu_H = \underline{\mu}_H \text{ and } v_H = 1 - \bar{\mu}_H$$

c) Membership and non-membership function for Load

$$\mu_{VL}(x, [7.0, 5.0], [20.0, 20.0]) = e^{-\frac{1}{2} \left(\frac{x - [20.0, 20.0]}{[7.0, 5.0]} \right)^2}$$

$$\mu_{VL} = \underline{\mu}_{VL} \text{ and } v_{VL} = 1 - \bar{\mu}_{VL}$$

$$\mu_L(x, [8.0, 6.0], [40.0, 40.0]) = e^{-\frac{1}{2} \left(\frac{x - [40.0, 40.0]}{[8.0, 6.0]} \right)^2}$$

$$\mu_L = \underline{\mu}_L \text{ and } v_L = 1 - \bar{\mu}_L$$

$$\mu_H(x, [7.0, 5.0], [60.0, 60.0]) = e^{-\frac{1}{2} \left(\frac{x - [60.0, 60.0]}{[7.0, 5.0]} \right)^2}$$

$$\mu_H = \underline{\mu}_H \text{ and } v_H = 1 - \bar{\mu}_H$$

$$\mu_{VH}(x, [7.0, 5.0], [80.0, 80.0]) = e^{-\frac{1}{2} \left(\frac{x - [80.0, 80.0]}{[7.0, 5.0]} \right)^2}$$

$$\mu_{VH} = \underline{\mu}_{VH} \text{ and } v_{VH} = 1 - \bar{\mu}_{VH}$$

d) Membership and non-membership function for Signal Strength

$$\mu_W(x, [1.7, 1.2], [-95.0, -95.0]) = e^{-\frac{1}{2} \left(\frac{x - [-95.0, -95.0]}{[1.7, 1.2]} \right)^2}$$

$$\mu_W = \underline{\mu}_W \text{ and } v_W = 1 - \bar{\mu}_W$$

$$\mu_M(x, [1.7, 1.2], [-90.0, -90.0]) = e^{-\frac{1}{2} \left(\frac{x - [-90.0, -90.0]}{[1.7, 1.2]} \right)^2}$$

$$\mu_H = \underline{\mu}_H \text{ and } v_H = 1 - \bar{\mu}_H$$

$$\mu_S(x, [1.7, 1.2], [-85.0, -85.0]) = e^{-\frac{1}{2} \left(\frac{x - [-85.0, -85.0]}{[1.7, 1.2]} \right)^2}$$

$$\mu_S = \underline{\mu}_S \text{ and } v_S = 1 - \bar{\mu}_S$$

e) Membership and non-membership function User Mobility

$$\mu_L(x, [0.8, 0.6], [0, 0]) = e^{-\frac{1}{2} \left(\frac{x - [0, 0]}{[0.8, 0.6]} \right)^2}$$

$$\mu_L = \underline{\mu}_L \text{ and } v_L = 1 - \bar{\mu}_L$$

$$\mu_M(x, [0.7, 0.5], [3, 3]) = e^{-\frac{1}{2} \left(\frac{x - [3, 3]}{[0.7, 0.5]} \right)^2}$$

$$\mu_H = \underline{\mu}_M \text{ and } v_M = 1 - \bar{\mu}_M$$

$$\mu_H(x, [0.8, 0.6], [6, 6]) = e^{-\frac{1}{2} \left(\frac{x - [6, 6]}{[0.8, 0.6]} \right)^2}$$

$$\mu_H = \underline{\mu}_H \text{ and } v_H = 1 - \bar{\mu}_H$$

Table 2: Membership, Non-membership and Hesitancy Values Matrix for Latency (LA)

Fuzzy Set	Crisp Input					
	10	20	40	60	80	100
L	[0.08, 0.7, 0.22]	[1.0, 0.0, 0.0]	[0.0, 0.9992, 0.008]	[0.0, 1.0, 0.0]	[0.0, 1.0, 0.0]	[0.0, 1.0, 0.0]
M	[0.0, 0.0993, 0.0007]	[0.020, 0.9831, 0.0149]	[0.506, 0.3646, 0.0149]	[0.506, 0.3646, 0.0149]	[0.020, 0.9831, 0.0149]	[0.0, 1.0, 0.0]
H	[0.0, 1.0, 0.0]	[0.0, 1.0, 0.0]	[0.0, 1.0, 0.0]	[0.001, 0.9912, 0.0087]	[1.0, 0.0, 0.0]	[0.001, 0.9912, 0.0087]

Table 3: Membership, Non-membership and Hesitancy Values Matrix for Packet Loss (PL)

Fuzzy Set	CRISP INPUT					
	0	1	2	3	4	5
L	[1.0, 0.0, 0.0]	[0.2494, 0.5422, 0.2085]	[0.0039, 0.9561, 0.0401]	[0.0, 0.9991, 0.0009]	[0.0, 1.0, 0.0]	[0.0, 1.0, 0.0]
M	[0.0, 1.0, 0.0]	[0.001, 0.9961, 0.0009]	[0.3604, 0.4606, 0.1790]	[0.3604, 0.4606, 0.1790]	[0.001, 0.9961, 0.0009]	[0.0, 1.0, 0.0]

	0.0]	0.0038]		0.1790]	0.0038]	0.0]
H	[0.0,	[0.0,1.0,	[0,0.991,	[0.0039,	[0.2494,	[1.0,
	1.0,	0.0]	0.0009]	0.9561,	0.5422,	0.0,
	0.0]			0.0041]	0.2085]	0.0]

Table 4: Membership, Non-membership and Hesitancy Values Matrix for Load (LD)

Fuzzy Set	10	30	50	70	90
VL	[0.1352, 0.6396, 0.2251]	[0.1352, 0.6396, 0.2251]	[0, 0.999, 0.0001]	[0.0, 1.0, 0.0]	[0.0, 1.0, 0.0]
L	[0, 0.9991, 0.0009]	[0.2494, 0.5422, 0.2085]	[0.2494, 0.5422, 0.2085]	[0, 0.9991, 0.0009]	[0.0, 1.0, 0.0]
H	[0.0, 1.0, 0.0]	[0.0, 1.0, 0.0]	[0, 0.999, 0.0001]	[0.1353, 0.6396, 0.2251]	[0.0, 0.9999, 0.0001]
VH	[0.0, 1.0, 0.0]	[0.0, 1.0, 0.0]	[0, 0.999, 0.0001]	[0.1353, 0.6396, 0.2251]	[0.1353, 0.6396, 0.2251]

Table 5: Membership, Non-membership and Hesitancy Values Matrix for Signal Strength (SS)

Fuzzy Set	Crisp Inputs				
	-96	-94	-90	-85	-82
W	[0.7066, 0.1589, 0.1345]	[0.7066, 0.1589, 0.1345]	[0.002, 0.9689, 0.0131]	[0.0, 1.0, 0.0]	[0.0, 1.0, 0.0]
M	[0.0, 0.9980, 0.0020]	[0.0039, 0.9372, 0.00589]	[1.0, 0.0, 0.0]	[0.002, 0.9868, 0.0131]	[0.0, 1.0, 0.0]
S	[0.0, 1.0, 0.0]	[0.0, 1.0, 0.0]	[0.002, 0.9868, 0.0131]	[1.0, 0.0, 0.0]	[0.0044, 0.7893, 0.1668]

Table 6: Membership, Non-membership and Hesitancy Matrix for User Mobility

Fuzzy Set	Crisp Input				
	1	2	3	4	5
L	[0.2494, 0.5422, 0.2085]	[0.0039, 0.9561, 0.0040]	[0.00, 0.9991, 0.0009]	[0.0, 1.0, 0.0]	[0.0, 1.0, 0.0]
M	[0.0003, 0.9831, 0.0165]	[0.1353, 0.6396, 0.2251]	[1.0, 0.0, 0.0]	[0.1353, 0.396, 0.225]	[0.0003, 0.9831, 0.0165]
H	[0.0, 1.0, 0.0]	[0.0, 1.0, 0.0]	[0.000, 0.991, 0.0009]	[0.0039, 0.9561, 0.0040]	[0.2494, 0.5422, 0.2085]

Intuitionistic Fuzzy Rules (IFR) - CAC for Uncertainty and Congestion Elimination in 4G Networks.

Intuitionistic fuzzy rules are defined in the work based on (25). Fuzzy rules for the MF and NMFs are defined respectively based on and (26-27). Rules are

defined based on human expert opinion. There are 243 rules defined for the IT2IFLS and parts of the rules are presented Table 7 for simplicity. In the IT2FLS, the rule base part re enclosed with five antecedents (LA, PL, SS, LD, UM).

Table 7: Intuitionistic Fuzzy Rules (IFR)

S/N	Latency	Packet Loss	Load	Signal Strength	User Mobility	CAF
1	L	L	VL	W	H	EXCELLENT [1.0,0.0]
2	H	H	VH	S	L	FAIR [1.0, 0.0]
3	H	H	VH	S	L	FAIR [1.0, 0.0]
4	L	M	VL	W	H	EXCELLENT [1.0, 0.0]
5	L	H	VL	W	H	GOOD [0.3, 0.8]
6	L	L	VL	W	H	EXCELLENT [1.0, 0.0]
7	L	M	VL	W	H	GOOD [0.3, 0.8]
8	L	H	VL	W	H	GOOD [1.0, 0.0]
9	M	L	VL	W	H	GOOD [0.3, 0.8]
10	M	M	VL	W	H	GOOD [1.0, 0.0]
11	M	H	VL	W	H	GOOD [1.0, 0.0]
12	H	L	VL	W	H	GOOD [1.0, 0.0]
13	H	M	VL	W	H	GOOD [1.0, 0.0]
14	H	H	VL	W	H	FAIR [0.32, 0.71]
15	H	L	VL	W	H	GOOD [1.0, 0.0]
16	H	M	VL	W	H	FAIR [0.32, 0.71]
17	H	H	VL	W	H	FAIR [1.0, 0.1]
18	L	M	L	M	M	EXCELLENT [1.0, 0.0]
19	L	H	L	M	M	GOOD [0.3, 0.8]
20	L	M	L	M	M	GOOD [0.3, 0.8]
21	L	H	L	M	M	GOOD [1.0, 0.0]
22	M	M	L	M	M	GOOD [1.0, 0.0]
23	M	H	L	M	M	GOOD [1.0, 0.0]
24	H	M	L	M	M	GOOD [1.0, 0.0]
25	H	H	L	M	M	FAIR [0.32, 0.71]
26	H	M	L	M	M	FAIR [0.32, 0.71]
27	H	H	L	M	M	FAIR [0.9, 0.22]
28	L	H	H	S	L	GOOD [0.3, 0.8]
29	L	M	H	S	L	EXCELLENT [1.0, 0.0]
30	L	M	H	S	L	GOOD [0.3, 0.8]
31	L	H	H	S	L	GOOD [1, 0.1]
32	M	M	H	S	L	GOOD [1, 0.1]
33	M	H	H	S	L	GOOD [1.0, 0.0]
34	H	M	H	S	L	GOOD [1.0, 0.0]
35	H	H	H	S	L	FAIR [0.32, 0.71]

36	H	M	H	S	L	FAIR [0.32, 0.71]
37	H	H	H	S	L	FAIR [1, 0.1]
38	L	L	VH	W	H	GOOD [1, 0.1]
39	L	M	VH	W	H	GOOD [1, 0.1]
40	L	H	VH	W	H	FAIR [0.32, 0.71]
41	L	L	VH	M	M	GOOD [0.3, 0.8]

Intuitionistic Fuzzy Inference Mechanism (IFIM) for IT2IFL-CAC

In IT2IFLS, the IFIM is applied and the appropriate IF- THEN type intuitionistic fuzzy rules in the knowledge base is activated using Mamdani inference method in (28).The M and NM interval of each of the crisp input is computed and then the firing strength of the pth rule of the fired M/NM values for both the upper and lower bounds are calculated. The fired rules are

combined and the input IT2FSs and output IT2FSs are mapped by computing unions and intersections of type-2 sets, as well as compositions of type-2 relations for the MFs and NMFs using (29)–(32) respectively. The main idea is to determine the effect of the five input parameters (Latency, Packet Loss, Load, Signal Strength and User Mobility) in the antecedent partsuch that a concise representation of the system’s behavior which is Call Admittant Factor (CAF) in this case is produced in the consequent part.

For example, given the crisp input vector, $v = [20, 2, 50, -94, 2]$ their degree of M and NM are calculated from respective Gaussian MFs and the fuzzified values for the five input parameters and is presented in Table 8. Evaluating rules 20, 22, 30, 32, 45 against the IFS yields the firing level as shown in Table 9.

Table 8: Fuzzified Values with crisp vector of [20, 2, 50, -94, 2]

Latency $[\underline{\mu}^1, \underline{\mu}^1, \overline{\nu}^1, \underline{\nu}^1]$	PacketLoss $[\underline{\mu}^2, \underline{\mu}^2, \overline{\nu}^2, \underline{\nu}^2]$	Load $[\underline{\mu}^3, \underline{\mu}^3, \overline{\nu}^3, \underline{\nu}^3]$	Signal Strength $[\underline{\mu}^4, \underline{\mu}^4, \overline{\nu}^4, \underline{\nu}^4]$	Mobility $[\underline{\mu}^5, \underline{\mu}^5, \overline{\nu}^5, \underline{\nu}^5]$
$\mu L [1.0, 1.0, 0.0, 0.0]$	$\mu L [0.037, 0.0422, 0.9578, 0.9963]$	$\mu VL [0.000, 0.0001, 0.9999, 1.000]$	$\mu W [0.6116, 0.7280, 0.2720, 0.3884]$	$\mu L [0.0037, 0.0422, 0.9578, 0.9963]$
$\mu M [0.0019, 0.0166, 0.9834, 0.9981]$	$\mu M [0.2959, 0.4429, 0.5571, 0.7041]$	$\mu L [0.1974, 0.3624, 0.6376, 0.8026]$	$\mu M [0.036, 0.0591, 0.9409, 0.9964]$	$\mu M [0.1649, 0.2793, 0.7207, 0.8951]$
$\mu H [0.0, 0.0, 1.000, 1.000]$	$\mu H [0.0, 0.0, 0.9991, 1.000]$	$\mu H [0.1352, 0.3601, 0.6399, 0.8648]$	$\mu S [0.0, 0.0, 1.0, 1.0]$	$\mu H [0.0, 0.0, 1.0, 1.0]$
		$\mu VH [0.000, 0.000, 0.9999, 1.000]$		

Table 9: Firing Level on Rule Evaluation of 20, 22, 30, 32, 45 against the IFS

Rule No.	Firing Interval	Consequent
R20	$[f_1^\mu, \overline{f}_1^\mu, f_1^\nu, \overline{f}_1^\nu] = [0.001443, 0.00006331, 0, 0]$	$[y_1^\mu, y_1^\nu] = \text{GOOD} [0.3, 0.8]$
R22	$[f_2^\mu, \overline{f}_2^\mu, f_2^\nu, \overline{f}_2^\nu] = [2.7420e-06, 1.0567e-06, 0.4956, 0.2404]$	$[y_2^\mu, y_2^\nu] = \text{GOOD} [1.0, 0.0]$
R30	$[f_3^\mu, \overline{f}_3^\mu, f_3^\nu, \overline{f}_3^\nu] = [0.0, 0.0, 0.0, 0.0]$	$[y_3^\mu, y_3^\nu] = \text{GOOD} [0.3, 0.8]$
R32	$[f_4^\mu, \overline{f}_4^\mu, f_4^\nu, \overline{f}_4^\nu] = [0.0, 0.0, 0.5966, 0.3405]$	$[y_4^\mu, y_4^\nu] = \text{GOOD} [1, 0.1]$
R45	$[f_5^\mu, \overline{f}_5^\mu, f_5^\nu, \overline{f}_5^\nu] = [2.0987e-10, 6.5133e-08, 0.6874, 0.4722]$	$[y_5^\mu, y_5^\nu] = \text{FAIR} [0.32, 0.71]$

Intuitionistic Defuzzification

The study adapts TSK method to compute the IT2IFLS final crisp output using (33) - (36) respectively. For our illustration, the crisp output, y is computed using the composition of member and non membership output values with the value β and P at 0.5 and 5.

$$\begin{aligned}
 (1 - \beta) \sum_{k=1}^P (\underline{f_k^\mu} + \overline{f_k^\mu}) y_k^\mu &= 2.2977e - 4 \\
 \sum_{k=1}^P \underline{f_k^\mu} + \sum_{k=1}^P \overline{f_k^\mu} &= 0.0015 \\
 \beta \sum_{k=1}^P (\underline{f_k^v} + \overline{f_k^v}) y_k^v &= 0.4585 \\
 \sum_{k=1}^P \underline{f_k^v} + \sum_{k=1}^P \overline{f_k^v} &= 2.8327 \\
 y &= 0.3151
 \end{aligned}$$

Hence, given the crisp input vector $v = [20, 2, 50, -94, 2]$ for LA, PL, LD, SS and UM, the Call Admittance Factor (CAF) produced is 0.3151 or 31.51% fair quality of service influence on the 4G network. This indicates that based on the level of influence of the five input variables on the output parameter, the IT2IFLS gives a CAF with 31.51% possibility.

The output of the system is described mathematically using (37). A threshold is set to categorize the level of system order to constrain the limits of acceptance values. A threshold is a value of a metric that should cause an alert to be generated or management action to be taken (Ramkumar and Mandalika, 2010). In this work, a threshold of 50% and above indicates that network resources are available hence; a call can be accepted into the network. Therefore, in regard the output of "CAF = 31%", the call will be blocked i.e. not accepted into the network.

$$\text{Output} = \begin{cases} \text{POOR:} & \text{if output} \leq 25\% \\ \text{FAIR:} & \text{if } 25\% < \text{output} \leq 50\% \\ \text{GOOD:} & \text{if } 50\% < \text{output} \leq 75\% \\ \text{EXCELLENT:} & \text{if output} > 75\% \end{cases} \quad (37)$$

For the purpose of comparison and testing of the utilization of our work, we employ the following performance measures: Mean Absolute Difference (MAD), Mean Absolute Percentage Error (MAPE), Mean Squared Error (MSE) and Root Mean Squared Error (RMSE) to measure our experimental results. The performance metrics are defined in (38) to (41) respectively.

$$\text{MAD} = \frac{1}{N} \sum_{i=1}^N |y^x - y| \quad (38)$$

$$\text{MAPE} = \frac{1}{N} \sum_{i=1}^N |y^x - y| / y^x \quad (39)$$

$$\text{MSE} = \frac{1}{N} \sum_{i=1}^N (y^x - y)^2 \quad (40)$$

$$\text{RMSE} = \sqrt{\frac{1}{N} \sum_{i=1}^N (y^x - y)^2} \quad (41)$$

Where y^x is desired output, y is the computed output and N is the number of data items respectively.

IV. Results and Discussion

The paper applies the IT2IFL model for uncertainty elimination and congestion control in 4G Networks call admission control. The system uses 4G network admission control quality of service indicators (variables) which are, Latency, Packet Loss, Load, Signal Strength and user Mobility to model their effects on Call Admittance Factor (CAF). The model employs intuitionistic fuzzifier based on a Gaussian membership function approach for membership function evaluation with intuitionistic width (variance) and center (mean) membership and non-membership for the input vectors respectively. Mamdani Fuzzy Inference is used to infer knowledge from the rule base where the output of each IF-THEN rule is an Intuitionistic fuzzy set. The inference engine returns a crisp set using the composition of the membership and the non-membership functions through defuzzification process. The system is developed using Java software development toolkit (SDK), IntelliJ Intergrated Development Environment (IDE), MySQL (Structured Query Language), etc.

The system is simulated with different sets of selected input values from the input parameters and the output (CAFs) are produced as results. Sample results of the application are shown in Figures 6 to 9 respectively. Parts of the results obtained from applying different IT2IFLS to the admission control process to eliminate uncertainty and control congestion in order to guarantee efficient QoS are presented in Table 10. Tables 11 give the results of the comparison of IT2IFLS with IT2FLS and T1FLS in CAC. Table 12 shows the results of performance evaluation of the application of the three approaches, IT2IFLS, IT2FLS and T1FLS in call admission control in 4G Network respectively. Figures 10 shows the graphs of Tables 10 for IT2IFLS and Figures 11 and 12 represent the graphs of the results of applying IT2FLS and T1FLS respectively. Figure 13 shows the graph of the results of comparison of the three approaches. The horizontal x-axis of the graphs presents the sample input dataset for the five input parameters (LA, PL, LD, SS and UM). While the computed output values being the Call Admittant Factor (CAF) are displayed on the vertical y-axis of the graphs respectively.

Table 10: Results of IT2IFL-CAC for Uncertainty and Congestion Elimination in 4G Networks

S/N	LA	PL	LD	SS	UM	IT2IFLS (CAF)
1	70	3.0	65	-86	1.0	0.8518
2	20	2	50	-94	2	0.3151

3	25	3.6	29	-92	5.5	0.7123
4	20	3.75	73	-92	5.0	0.3245
5	75	3.6	29	-92	5.5	0.6848
6	26	3.75	30	-92	5.5	0.4356
7	65	4.0	52	-85	1.5	0.6045
8	20	4.0	73	-85	2.0	0.6341
9	90	4.0	73	-85	2.0	0.4418
10	65	5.0	90	-91	4.55	0.3456
11	40	2.0	50	-70	3.0	0.5889
12	65	4.0	80	-95	4.0	0.9632
13	20	5.0	65	-80	1.0	0.6353
14	80	3.5	45	-75	2.5	0.6372
15	55	4.5	35	-75	3.0	0.9436
16	70	5	50	-95	3.0	0.6847
17	70	3	30	-95	3	0.7344
18	5	4	20	-95	3	0.6341
19	80	4	20	-80	3	0.5908
20	45	3	19	-81	2.7	0.3032

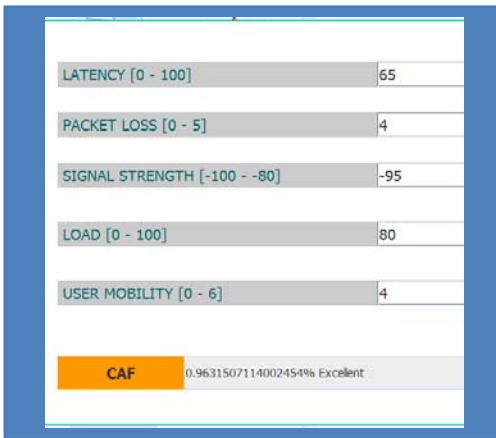


Fig. 6: The Result of IT2IFLS-CAC with input values of LA=65, PI=4, LD=80, SS=-95 and UB=4

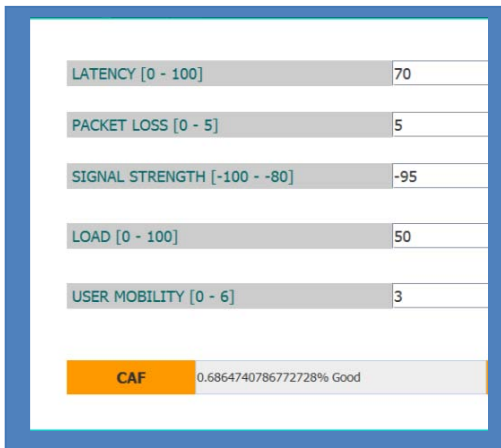


Fig. 7: The Result of IT2IFLS-CAC with input values of LA=70, PI=5, LD=50, SS=-95 and UB=3

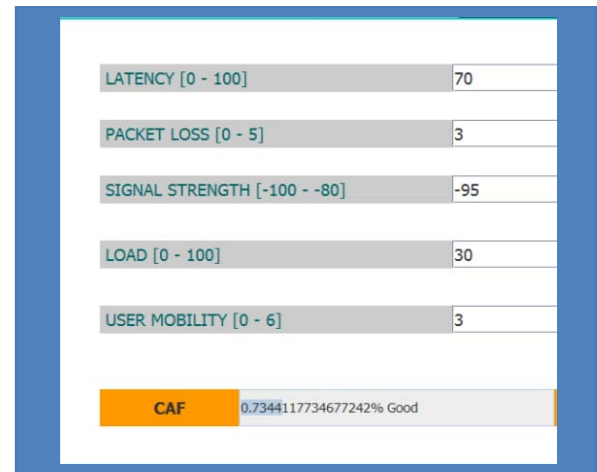


Fig. 8: The Result of IT2IFLS-CAC with input values of LA=70, PI=3, LD=30, SS=-95 and UB=3

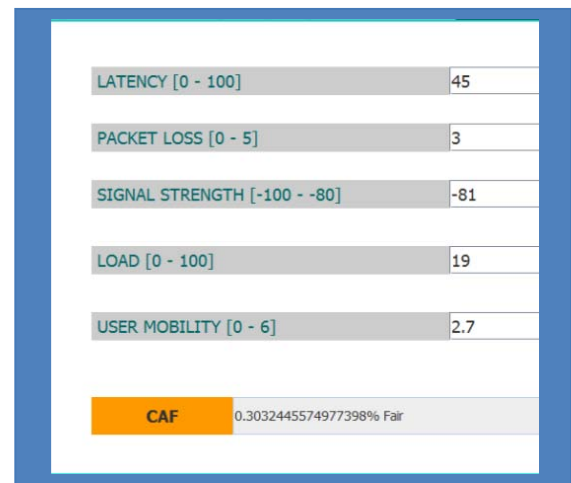


Fig. 9: The Result of IT2IFLS-CAC with input values of LA=45, PI=3, LD=19, SS=-81 and UB=2.7

Table 11: Results of comparison of IT2IFL, IT2FLS and T1FLS-CAC for Uncertainty and Congestion Elimination in 4G Networks

S/N	LA	PL	LD	SS	UM	T1FLS (CAF)	IT2FLS (CAF)	IT2IFLS (CAF)
1	70	3.0	65	-86	1.0	0.7912	0.8283	0.8518
2	20	2	50	-94	2	0.2134	0.2574	0.3151
3	25	3.6	29	-92	5.5	0.5952	0.6715	0.7123
4	20	3.75	73	-92	5.0	0.2503	0.3050	0.3245
5	75	3.6	29	-92	5.5	0.6122	0.6637	0.6848
6	26	3.75	30	-92	5.5	0.3947	0.4120	0.4356
7	65	4.0	52	-85	1.5	0.5272	0.5493	0.6045
8	20	4.0	73	-85	2.0	0.5821	0.6133	0.6341
9	90	4.0	73	-85	2.0	0.3982	0.4196	0.4418
10	65	5.0	90	-91	4.55	0.2766	0.3026	0.3456

11	40	2.0	50	-70	3.0	0.3948	0.4248	0.5889
12	65	4.0	80	-95	4.0	0.8238	0.8938	0.9632
13	20	5.0	65	-80	1.0	0.5433	0.6033	0.6353
14	80	3.5	45	-75	2.5	0.4701	0.5501	0.6372
15	55	4.5	35	-75	3.0	0.766	0.8066	0.9436
16	70	5	50	-95	3.0	0.6202	0.6623	0.6847
17	70	3	30	-95	3	0.6733	0.7149	0.7344
18	5	4	20	-95	3	0.5421	0.6252	0.6341
19	80	4	20	-80	3	0.4691	0.534	0.5908
20	45	3	19	-81	2.7	0.1356	0.2515	0.3032

Table 12: RMSE Comparison of IT2IFL, IT2FL and IT1FLS in Call Admission Control in 4G Network

	Mean	Variance	MAD	MAPE	MSE	RMSE
T1FLS	0.04967	0.02359	0.04534	47.7214	0.00157	0.01254
IT2FLS	0.05401	0.02007	0.04099	43.1488	0.00134	0.01157
IT2IFLS	0.06079	0.01577	0.03439	36.1972	0.00105	0.01025

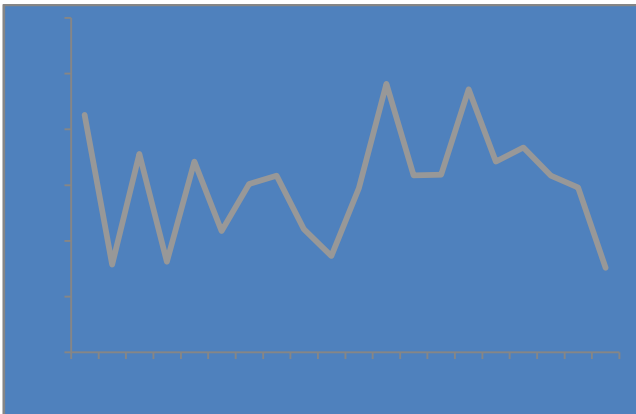


Fig. 10: Graph of IT2IFLS-CAC CAC for Uncertainty and Congestion Elimination in 4G Networks

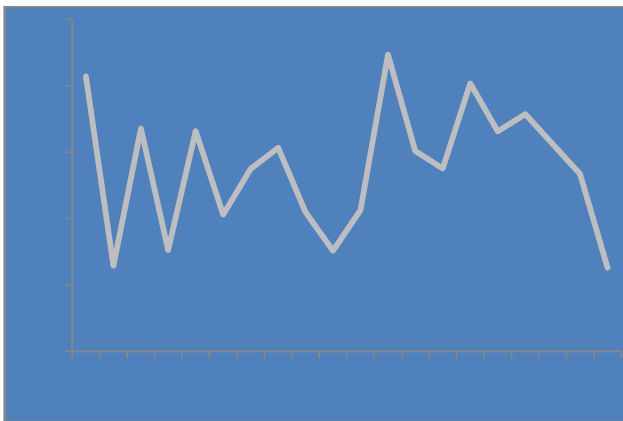


Fig. 11: Graph of IT2FLS-CAC CAC for Uncertainty and Congestion Elimination in 4G Networks

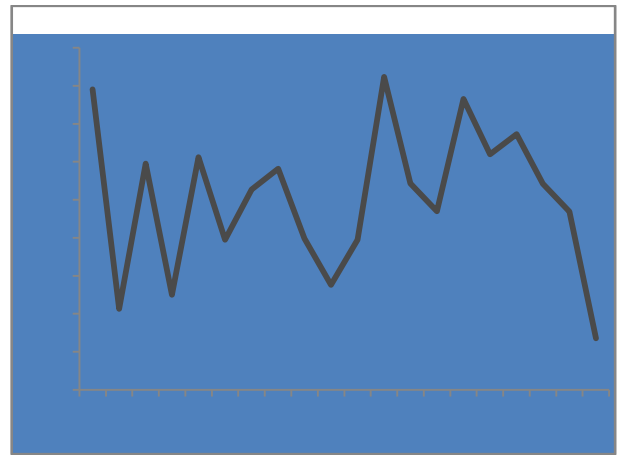


Fig. 12: Graph of T1FLS-CAC CAC for Uncertainty and Congestion Elimination in 4G Networks

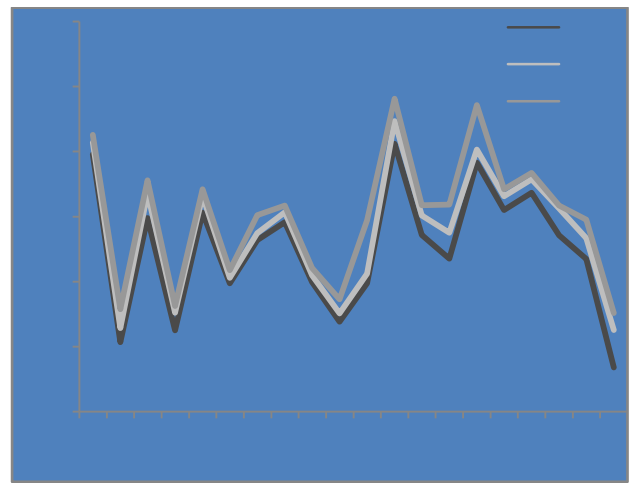


Fig. 13: Graph of comparison of IT2IFLS, IT2FLS and T1FLS CAC for Uncertainty and Congestion Elimination in 4G Networks

From Figures 6, it is observed that when the input values of moderate latency of 65%, moderate packet loss of 4%, high load of 80%, weak signal strength of -95dBm and moderate user mobility of 4m/s are selected and applied in the IT2IFLS-CAC system, the result yields approximately 96% excellent call admittance factor possibility. This indicates that the network has excellent resources to admit/accept the call into the network. From Figure 7, the result of IT2IFLS-CAC with input values of LA=70, PI=5, LD=50, SS=-95 and UB=3 gives a good call admittance factor of 68% based on the level of influence of the input on the output. This indicates that the network has good resources to admit/accept the call into the network. Figure 8, shows that with the input values of LA=70%, PI=3, LD=30%, SS=-95dBm and UB=3m/s, the results show that a 73% good call admittance based on the level of influence of the inputs on the output. This indicates that resources are available and the call is admitted into the network with a good QoS. With input values of LA=45%, PI=3, LD=19, SS=-81dBm and

UB=2.7m/s, the result in Figure 9 shows a poor call admittance factor of 30% based on the level of influence of the input on the output. This indicates that the network does not have enough resources to admit the call i.e. the call is not accepted into the network.

From Tables 10 and 12 it is observed that the result of IT2IFLS outperforms IT2FLS and T1FL on the same set of input parameters values. Example 1, with 20% Low Latency and 2% low packet loss, and 50% Low load, -94 low signal strength and 2% moderate user Mobility, 31.51(32%) fair CAF is achieved using IT2IFLS approach against 25.74(26%) fair and 0.2134(21%) poor CAF with IT2FL and T1FLS methods. Example 2, with 80% high Latency and 3.5% moderate packet loss, and 45% Low load, -94dBm low signal strength and 2.5m/s moderate user Mobility, 0.6372(64%) good CAF is achieved using IT2IFLS approach against good CAF IT2FL with 0.5501(55%) possibility and 0.4706(47%) fair CAF with T1FLS method. From Figure 10, it is generally observed that approximately 100% excellent optimal value in terms of QoS demands and overall network performance is achieved using the three approaches with 55% medium latency, 4.5% high packet loss, 35% low load, -75strong signal strength and 3.0m/s moderate user mobility factor. While approximately 70% good optimal quality of service demands and overall performance of the 4G network is accomplished using IT2IFLS, IT2FLS and T1FLS with 25% low latency, 3.6% high packet loss, 29% very low load, -92 strong signal strength and 5.5m/s high user mobility factors respectively. Generally, it noticed that an average of 35% poor quality of service demands and poor overall performance of the 4G network is accomplished using IT2IFLS, IT2FLS and T1FLS with 25% low latency, 3.6% high packet loss, 29% very low load, -92 strong signal strength and 5.5m/s high user mobility factors respectively.

Considering the entire dataset, it is generally observed that the network exhibits 20% excellent, 47% good, 33% fair and 0% poor performance with respect to IT2IFLS against IT2FLS with 20% excellent, 40% good, 40% fair and 0% poor performance and T1FLS with 20% excellent, 26.7% good, 47% fair and 6.7% poor performance in uncertainty and congestion elimination in 4G Networks for improve QoS. From the above result, it can be deduced that on the same sets of data, the three approaches exhibit same level of optimal excellent performance. While our system outperforms its counterparts in achieving 47% good performance against 40% and 26.7% respectively in handling uncertainty and congestion control in 4G network. However, there is an indication that T1FLS has produced 47% fairest performance compared to IT2IFLS and IT2FLS generally. This is an indication that in some cases, where the system is less noisy, classical F1LS achieve the fairest performance to the IT2IFLS and IT2FLS counterparts.

The result of the measurement and evaluation of IT2IFLS-CAC developed system using VARIANCE, MAD, MAPE, MSE and RMSE for the purpose of comparison and testing of the experimental results for utilization against IT2FLS and T1FLS are presented in Table 13. From Table 13, it is observed that, our model, IT2IFLS gives the least VARIANCE of 0.01577 against IT2FLS with 0.02007 and T1FLS with 0.02359 respectively. From the table, it is also noted that, the MAD performance measure shows the lowest error rate of 0.03439 with IT2IFLS as it outperforms IT2FLS and T1FL with error rates of 0.04099 and 0.04534 respectively. Performance evaluation with MAPE gives the least percentage error of approximately 36% with IT2IFLS as it outperforms IT2FLS and T1FL with the approximate percentage error of error of 43% and 48% respectively. From the same table, it is also indicated that IT2IFLS outperforms both classical IT2FLS and IFLS in terms of the MSE test with error rates of 0.00105 against 0.00134 and 0.00157 respectively. Also, it is interesting to observe from the table that RMSE performance measure applied in the work gives the least error rate of 0.01025 with IT2IFLS as it outperforms IT2FLS with error rate of 0.01157 and T1FL with error rate of 0.01254 respectively.

From the results of the five performance indicators applied in the study, it is generally observed that MSE gives the least error rate followed by RMSE. The least MSE and RMSE in IT2IFLS compared with IT2FLS and T1FL is as a result of the presence of additional degrees of freedom in the NMF and hesitation indexes. It is observed that the lower the error, the better the performance of the technique. Also, the increase in the level of fuzziness in IT2IFLS gives a more accurate and promising approximation and a significant performance improvement compared to IT2FLS and T1FL approaches in handling CAC control problem. This way our Fuzzy system behaves more humanly as it can cater for the situations where an expert cannot give sufficient knowledge about a criterion or parameter. The system is expected to improve the utilization of network resources as well as keeping satisfactory QoS levels.

V. Conclusion

The paper uses the IT2IFLS call admission control (CAC) approach for uncertainty elimination and congestion control for guaranteed QoS in 4G mobile Networks in order to improve the system performance. Also, the study implements IT2FLS and T1FLS CAC for the purpose of comparison. The system is able to determine the effect of input variables, latency, packet loss, load, signal strength and user mobility in the antecedent part and a concise representation of the system's behavior which is call connection is produced in the consequent part. We have shown that IT2IFLS-CAC outperforms IT2FLS and T1FLS on the same set of input parameters values. From the study, it is shown that

IT2IFLS-CAC gives a better and more accurate performance than IT2FLS and T1FL. This is as a result of the presence of additional degrees of freedom in the NMF and hesitation indexes. Also, as shown in the Table 13, IT2IFLS approach exhibits superior performance with MSE and RMSE on test data than IT2FLS and T1FLS respectively. The IT2IFLS approach exhibits most superior performance with MSE in all cases. Particularly, the study has been able to show that an IT2IFLS for call admission control is able to preserve all the qualities of an IT2IFLS for call admission control of congestion and has the ability to still cope with adequately with uncertainty in the packet delay measurements in 4G networks. The IT2IFLS has indicated its ability to further reduce uncertainty by handling conflicting evaluation involving membership (M) non-membership (NM) and hesitation and the capacity to cope with more imprecision thereby modeling imperfect and imprecise knowledge better than IT2FLS and T1FLS. In the future, we aim to employ triangular membership functions and TSK fuzzy inference in the design of IT2IFLS for CAC in 4G networks. Also, we intend to learn and optimize the parameters of the membership and non membership functions of IT2IFLS-TSK for a better performance by using learning tools such as gradient descent (GD), decoupled extended Kalman filter (DEKF), particle swarm optimization (PSO), flower pollination algorithm, etc and compare results with our system.

Funding: This study was funded through authors' contributions.

Conflict of Interest: Uduak Umoh declares that she has no conflict of interest. Imo Eyoh declares that she has no conflict of interest. Etebong Isong declares that she has no conflict of interest. Andy Inyang declares that she has no conflict of interest.

Ethical approval: All procedures performed in studies involving human participants were in accordance with the ethical standards of the institutional and/or national research committee and with the 1964 Helsinki declaration and its later amendments or comparable ethical standards.

Informed consent: Informed consent was obtained from all individual participants included in the study.

References Références Referencias

1. E. Bohlin, S. Lindmark, J. Bjrkdahl, A. Weber, B. Wingert, P. Ballon, "The Future of Mobile Communications in the EU: Assessing the Potential of 4G", ESTO Publications, February, 2004.
2. Mahesh G , Yeshwanth S , Dr. Gowrishankar 2014 Fuzzy Logic based Call Admission Control for Next Generation Wireless Networks. International Journal of Advanced Research in Computer and Communication Engineering Vol. 3, Issue 8, August 2014, 7731-7738.

3. Fang, Y. and Zhang, Y. (2002), Call admission control schemes and performance analysis in wireless mobile networks. *IEEE Transactions on Vehicular Technology* 51(2): 371 – 382. DOI: 10.1109/25. 994812.
4. Leung, V.C.M. and Yu, F. (2002) Mobility-based predictive call admission control and bandwidth reservation in wireless cellular networks, in: Proc. 20th Conf. on Computer Communications (IEEE INFOCOM), Anchorage, AK (2001) pp. 518–526.
5. Lindemann, C., Lohmann, M. and Thümmler, A. (2004) Adaptive Call Admission Control for QoS/Revenue Optimization in CDMA Cellular Networks. *Wireless Networks*, 10, 457–472.
6. Lawal, M. A., Saidu, I. and Abdullahi, Y. S. (2017), Call Admission Control Schemes in LTE Networks: A Survey. *International Journal of Computer Science and Network*, 6(4), 523-532.
7. Rahman, A., Sohang, S. I., Ahmmed , R. and Anjum, A. (2018). Defined Limited Fractional Channel Scheme for Call Admission Control by Two-Dimensional Markov Process based Statistical Modeling. *Advances in Science, Technology and Engineering Systems Journal* Vol. 3, No. 4, 295-307 (2018) DOI: 10.25046/aj030430.
8. Ramkumar, V., Mihovska, A. D., Prasad, N. R., & Prasad, R. (2010), Fuzzy-Logic Based Call Admission Control For A Heterogeneous Radio Environment. Paper presented at WPMC 2009 Japan, Sendai, Japan, 1-6.
9. Ovengalt, C. B. T., Djouani, K. and Kurien, A. (2014), A fuzzy approach for call admission control in LTE Networks. *Procedia Computer Science* 32 (2014) 237 – 244.
10. Zadeh L. A. (1965). "Fuzzy sets," *Inf. Contr.*, 8, 338–353.
11. Gunjan G. (2014). *Introduction to Artificial Intelligence*. SK Kataria and Sons.
12. H. Hagrass "Type-2 flcs: A new generation of fuzzy controllers". *IEEE Computational Intelligence Magazine*, vol. 2, no. 1, 30–43, 2007.
13. Mendel J. M. (2001). "On the importance of interval sets in type-2 fuzzy logic systems," in Proc. Joint 9th IFSA World Congr. 20th NAFIPS Int. Conf., Vancouver, BC, Canada, Jul. 25–28, 1647–1652.
14. Zadeh L. A. (1975). "The concept of a linguistic variable and its application to approximate reasoning—1," *Inform. Sci.*, 8, 199–249.
15. Hisdal 1981 The IF THEN ELSE statement and interval-valued fuzzy sets of higher type. *International Journal of Man-Machine Studies*, Vol.15, Issue 4, November 1981, Pages 385-455.
16. John 1998 Type 2 Fuzzy Sets: An Appraisal of Theory and Applications. *International Journal of Uncertainty, Fuzziness and Knowledge-Based Systems* Vol. 06, No. 06, pp. 563-576 (1998).

17. N. N. Karnik and J. M. Mendel, "Centroid of a type-2 fuzzy set," *Information Sciences*, vol. 132, pp. 195-220, 2001.
18. H. Wu and J. M. Mendel "Uncertainty Bounds and Their Use in the Design of Interval Type-2 Fuzzy Logic Systems". *IEEE Transactions on Fuzzy Systems*, vol. 10, no. 5, 622-640, 2011.
19. Arend Heyting (1930). *Die formalin Regeln der intuitionistischen Logik*, Sitzungsberichte der Preussischen Akademie der Wissenschaften, Physikalisch-mathematische Klasse, 42–56.
20. Van Dalen, D., 2001, L.E.J. Brouwer (een biografie), Amsterdam: Uitgeverij Bert Bakker.
21. Moschovakis, Joan, "Intuitionistic Logic", *The Stanford Encyclopedia of Philosophy* (Spring 2015 Edition), Edward N. Zalta (ed.), <https://plato.stanford.edu/archives/spr2015/entries/logic-intuitionistic/>.
22. K. T. Atanassov, "Intuitionistic fuzzy sets," *Fuzzy sets and Systems*, vol. 20, no. 1, pp. 87–96, 1986.
23. O. Castillo, P. Melin "Type-2fuzzylogic: theory and application". *Studfuzz*, vol. 223, pp. 29–43, 2008.
24. K. Atanassov and G. Gargov, "Interval valued intuitionistic fuzzy sets," *Fuzzy sets and systems*, vol. 31, no. 3, pp. 343–349, 1989.
25. Deng-Feng, L.: *Decision and game theory in management with intuitionistic fuzzy sets*. Springer, Berlin (2014).
26. Eyoh, I., John, R., De Maere, G.: Interval type-2 intuitionistic fuzzy logic system for non-linear system prediction. In: *Systems, Man, and Cybernetics (SMC), 2016 IEEE International Conference on*, IEEE (2016) 001063{001068.
27. Das, S., Kar, S., Pal, T.: Robust decision making using intuitionistic fuzzy numbers. *Granular Comput* 2, 41–54 (2017). Eyoh, I.: "Interval type-2 atanassov-intuitionistic fuzzy logic for uncertainty modelling." Ph.D. dissertation, University of Nottingham, (2018).
28. Ghaderi M. & Boutaba R. (2006). "Call admission control for voice/data integration, in broadband, wireless networks," in *IEEE Transactions on Mobile Computing*, 5(3)193-207.
29. S. Kumar, K. Kumar and K. Pandey" A Comparative Study of Call Admission Control in Mobile Multimedia Networks using Soft Computing. *International Journal of Computer Applications* (0975 – 8887) Vol. 107 Issue 16, pp 1-7, 2014.
30. Y. Bazaz1, S. Kumar and S. Anand, "Congestion Control Mechanism using Fuzzy Logic". *International Journal of Emerging Trends & Technology in Computer Science (IJETTCS)* vol. 2, no. 2, pp. 313-319, 2013.
31. J. Ye, X. Shen, and J. Mark, "Call admission control in wideband CDMA cellular networks by using fuzzy logic". *IEEE Trans. Mobile Comput.*, vol. 4, no. 2, pp. 129-141, 2005.
32. C. Sonmez, O. Incel, S. Isik, M. Donmez and C. Ersoy, "Fuzzy-based congestion control for wireless multimedia sensor networks". *Sonmezet al. EURASIP Journal on Wireless Communications and Networking*, no. 63, pp 1-17, 2014.
33. P. Metre, K. Radhika, Gowrishankar" *Survey of Soft Computing Techniques for Joint Radio Resource Management*", 978-1-4673-1520, IEEE 2012.
34. J.D. Mallapur, Syed Abidhusain, Soumya S. Vastrad, and Ajaykumar C. Katageri 2010. Fuzzy Based Bandwidth Management for Wireless Multimedia Networks. *Information Processing and Management - International Conference on Recent Trends in Business Administration and Information Processing, BAIP 2010*, Trivandrum, Kerala, India, March 26-27, 2010. *Proceedings. Communications in Computer and Information Science* 70:81-90 DOI: 10.1007/978-3-642-12214-9_15
35. Chang, H. H. and Chen, S. W. (2010) Consumer perception of interface quality, security, and loyalty in electronic commerce. *Information & Management* 46 (2009) 411–417.
36. Ramesh, B. H. S., Subrahmanyam, G, and P.S. Satyanarayana (2010). A QoS Provisioning Recurrent Neural Network based Call Admission Control for beyond 3G Networks. *IJCSI International Journal of Computer Science Issues*, Vol. 7, Issue 2, No 5, 7-16, March 2010.
37. G. U. Mali "Fuzzy Based Vertical Handoff Decision Controller for Future Networks". *International Journal of Advanced Engineering, Management and Science (IJAEMS)* vol. 3, no.1, 111-119, Jan- 2017
38. Umoh, U. A., Asuquo, D., Eyoh, I. J. and Offisong, M. (2017). An Intelligent Call Admission Controller for guaranteed QoS in 4G Mobile Networks. *International Journal of Soft Computing (IJSC)*. 8(3/4), 21-38. DOI:10.5121/ijsc.2017.8403.
39. Umoh, U. A., Asuquo, D. and Eyoh, I. J. (2017). An Interval Type-2 Fuzzy Logic Based Framework for Call Admission Control in 4G Mobile Networks. *Proceedings of Computer Science & Information Technology (CSIT) 3rd International Conference on Artificial Intelligence and Soft Computing (AIS)*, 26th – 27th August, 2017, Crowne Plaza, Dubai, UAE, 23-36.
40. H. Wu and J. M. Mendel "Uncertainty Bounds and Their Use in the Design of Interval Type-2 Fuzzy Logic Systems". *IEEE Transactions on Fuzzy Systems*, vol. 10, no. 5, 622-640, 2011.
41. J. M. Mendel, R. I. John, and F. Liu, "Interval type-2 fuzzy logic systems made simple," *IEEE Transactions on Fuzzy Systems*, vol. 14, no. 6, pp. 808–821, 2006.
42. Nguyen, D. D., Ngo, L. T. and Pham, L. T. (2013), Interval type-2 fuzzy cmeans clustering using intuitionistic fuzzy sets, in *IEEE Third World Congress*

on Information and Communication Technologies (WICT), 2013, pp. 299–304.

43. P. Hájek and V. Olej, "Intuitionistic fuzzy neural network: The case of credit scoring using text information," in *Engineering Applications of Neural Networks*. Springer, 2015, pp. 337–346.
44. Imo Eyoh, Eyoh, J. Eyoh and Kalawsky, R. (2020) Interval type-
45. intuitionistic fuzzy logic system for time series and identification problems - a comparative study. *International Journal of Fuzzy Logic Systems (IJFLS)* Vol.10, No.1, January 2020, 1-18.
46. Eyoh, I., John, R., Maere, G.D.: Time series forecasting with interval type-2 intuitionistic fuzzy logic systems. In: *2017 IEEE International Conference on Fuzzy Systems (FUZZ-IEEE)*. (July 2017)
47. Mamdani EH (1974) Application of fuzzy algorithms for control of simple dynamic plant. *Proc Inst Electr. Eng.* 121(12):1585–1588.

