

A Robust Online Method for Face Recognition Under Illumination Invariant Conditions

Dr. S.M. Riyazoddin¹

¹ CMR Institute of Technology, Hyderabad, Andhra Pradesh.

Received: 13 February 2012 Accepted: 3 March 2012 Published: 15 March 2012

Abstract

In case of incremental inputs to an online face recognition with illumination invariant face samples which maximize the class-separation criterion but also incorporates the asymmetrical property of training data distributions. In this paper we alleviate this problem with an incremental learning algorithm to effectively adjust a boosted strong classifier with domain-partitioning weak hypotheses to online samples, which adopts a novel approach to efficient estimation of training losses received from offline samples. An illumination invariant face representation is obtained by extracting local binary pattern (LBP) features NIR images. The Ada-boost procedure is used to learn a powerful face recognition engine based on the invariant representation. We use Incremental linear discriminant analysis (ILDA), in case of sparse function for active near infrared (NIR) imaging system that is able to produce face images of good condition regardless of visible lights in the environment accuracy by changes in environmental illumination The experiments show convincing results of our incremental method on challenging face detection in extreme illuminations.

Index terms— Incremental learning; online and offline; Adaboost; sparse function.

1 INTRODUCTION

uring the past decade, face recognition has drawn significant attention from the perspective of different applications [1,2]. A general statement of the face recognition problem can be formulated as follows [2,3]. Given still or video images of a scene, the problem is to identify or verify one or more persons in the scene using a stored database of faces. Face recognition under varying lighting conditions is challenging, especially for single image based recognition system. Extracting illumination invariant [4] features is an effective approach to solve this problem. However, existing methods are hard to extract both multiscale and multi-directivity geometrical structures at the same time, which is important for capturing the intrinsic features of a face image. The environment surrounding a face recognition application can cover a wide spectrum from a well controlled environment to an uncontrolled one, means offline respect to online [5].

In a controlled environment, frontal and profile photographs of human faces are taken complete with a uniform background and identical poses among the participants. In the case of uncontrolled environment, recognition of human faces is to be done at different scales, positions, luminance and orientations; facial hair, makeup and turbans etc. In conditions such as these, invariance to changing lighting is perhaps the most significant practical challenge for face recognition algorithm boosting. The illumination setup in which recognition is performed is in most cases impractical to control, its physics difficult to accurately model and recover, with face appearance differences due to varying illumination often larger in magnitude than those differences between individuals. Additionally, the nature of most real-world applications is such that prompt, often real-time system response is needed, demanding appropriately efficient as well as robust matching algorithms [6]. This challenging and interesting problem has attracted researchers from various background i.e., psychology, pattern recognition,

neural networks, computer vision and computer graphics [7]. The challenges associated with face recognition can be attributed to the following factors:

? Pose: The images of a face vary due to the relative camera-face pose (frontal, tilted, profile, upside down).

2 ? Presence or absence of structural components:

Facial features such as beards, mustaches, and glasses may or may not be present and there is a great deal of variability among these components including shape, color and size. ? Facial expression and emotions: The appearance of faces is directly affected by a person's facial expression and emotions. ? Occlusion: Faces may be partially occluded by other objects. For an example, in an image with a group of people, some faces may partially occlude other faces. ? Image orientation: Face images directly vary for different rotations about the camera's optical axis. ? Imaging conditions: When the image is formed, factors such as lightning and camera characteristics affect the appearance of a face.

In general, face recognition algorithms can be divided into two groups based on the face representation [8], they are: ? Appearance-based which uses holistic texture features and is applied to either whole-face or specific regions in a face image.

3 D

? Feature-based which uses geometric facial features (mouth, eyes, brows, cheeks etc.) and geometric relationships between them.

Holistic based method uses the whole face region as input to the recognition system. Subspace analysis is done by projecting an image into a lower dimensional subspace formed with the help of training face images and after that recognition is performed by measuring the distance between known images and the image to be recognized. The most challenging part of such a system is finding an adequate subspace. Some well known face recognition algorithms for face recognition are Principal Component Analysis (PCA), Independent Component Analysis (ICA), Linear Discriminant Analysis (LDA) [9,10], Incremental LDA allows highly efficient learning to adapt to new data sets. A solution closely agreeing with the batch LDA result can be obtained with far lower complexity in both time and space; there are very few works on incremental learning for sparse LDA. Computational models of faces have been an active area of research since late 1980s, for they can contribute not only to theoretical insights but also to practical applications, such as criminal identification, security systems, image and film processing, and human-computer interaction, etc.

One of the difficulties might be due to the fact that the sparse LDA problem is non-convex and NPhard. It is not straightforward to design an incremental solution for sparse LDA. Computation cost and memory requirements for training an AdaBoost detector are extremely high. Viola and Jones spent weeks on training a detector with 6060 features (weak learners) on a face training set of 4916, the fast implementation of AdaBoost methods and forward feature selection (FFS) for fast training under online boosting. The illumination based incremental LDA [11,12] algorithm can also be incorporated into a classic semi-supervised learning framework and applied to many other problems in which LDA-like discriminant components are required. However, developing a computational model of face recognition is quite difficult, because faces are complex, multidimensional, and subject to change over time [13,14].

4 II. ILLUMINATION INVARIANT

First, A traditional method for dealing with illumination changes in tracking algorithm has been to use illumination invariant features [1,11], such as edges. In principle, the entire sets of contour-tracking algorithms are invariant to illumination. However, the computer vision community has recently witnessed the development of several excellent tracking methodologies that are based primarily on tracking photometric, i.e. illumination dependent, variables (such as intensity, color, or texture). Second, Shadow compensation method that compensates for illumination variation in a face image so that the image can be recognized by a face recognition system designed for images under normal illumination condition. Generally, human faces are similar in shape in that they are comprised of two eyes, a nose and a mouth. Each of these components forms a shadow on a face, showing distinctive characteristics depending on the direction of light in a fixed pose. By using such characteristics generated by the shadow, we can compensate for illumination variation on a face image caused by the shadow and obtain a compensated image that is similar to the image taken under frontal illumination. There could be two approaches to illumination invariant face recognition: by a highly nonlinear face matching engine with an illumination variant representation or by an illumination invariant face representation with a less complicated face matching engine. Work in illumination invariant face recognition focused on image representations that are mostly insensitive to changes in illumination the image representations and distance measures are evaluated on a tightly controlled face database which varied face pose, illumination and expression. The image representations include edge maps, 2D Gabor-like filters, first and second derivatives of the gray-level image and the logarithmic transformations of the intensity image along with these representations; under normal illumination condition shown in figure ??.

Figure ?? : Common conditions of illumination-invariant Generally, human faces are similar in shape in that they are comprised of two eyes, a nose and a mouth algorithm for illumination-invariant change detection that

combines a simple multiplicative illumination model with decision approaches to change detection. The core of our algorithm is a new statistical test for linear dependence color of vectors observed in noise. This criterion can be employed for a significance test, but a considerable improvement of reliability for real-world image sequences is achieved if it is integrated into a Bayesian framework that exploits spatial-temporal contiguity and prior knowledge about shape and size of typical change detection masks.

5 a) Extrapolation in Illumination Specifications

The Recognition in uncontrolled situations is one of the most important bottlenecks for practical face recognition systems. We address this by combining the strengths of robust illumination normalization, local texture based face representations and distance transform based matching metrics [11]. Specifically, here Year make three main contributions: (i) we present a simple and efficient preprocessing chain that eliminates most of the effects of changing illumination while still preserving the essential appearance details that are needed for recognition; (ii) we introduce Local Ternary Patterns (LTP), a generalization of the Local Binary Pattern (LBP) local texture descriptor that is more discriminant and less sensitive to noise in uniform regions; and (iii) we show that replacing local histogramming with a local distance transform based similarity metric further improves the performance of LBP/LTP based face recognition, which is an illumination invariant signature, to generate face images under arbitrary illumination conditions proposed a method to eliminate the influence due to illumination variation by using a 2D shape model, which separates an input image into a texture model and a shape model for retaining shape information.

An incremental method is tries to alleviate the effect of uneven illumination by using the techniques of local normalization of local binary pattern. In order to handle pose variation, Pentland [2], proposed a viewbased Eigen-space method and Huang, used a neural network with a view-specific eigen-faces for face recognition [6,7].

Ralph Gross, presented the concept of light field to characterize the continuous pose space, and (Liu-2005), are proposed a Gabor-based kernel PCA using Gabor wavelets and a kernel. However, most of 2D image-based methods deal with either illumination or pose variation, and so it is difficult to apply them directly when both illumination and pose variations are present.

6 b) Face recognition under low illumination and high Dirt

It is difficult to exclude impact of human factor upon recognition result. In condition of environment and light factor is fully effective on camera properties and performance and it is defected accuracy of result, although fingerprint identity recognition technology has been mature. However, it is not applicable to a complicated environment under low illumination and high dirt [1,6,11]. Low illumination and high dirt identity recognition technology based on facial features has an extensive application prospect since it is needed in many industry sectors. Under low illumination and high dirt environment, compared with other biological features (fingerprint, voice, DNA, etc.), it is the most direct and natural method to use facial features in identity verification technology.

7 c) Illumination by Sparse Function representation

In the statistical signal processing community, the algorithmic problem of computing sparse linear representations with respect to an over complete dictionary of base elements or signal atoms has seen a recent surge of interest. Much of this excitement centers on the discovery that whenever the optimal representation is sufficiently sparse, it can be efficiently computed by convex optimization [9], even though this problem can be extremely difficult in the general case. We exploit sparse representation [1,2] for robust visual tracking with the intuition that the appearance of a tracked object can be sparsely represented by its appearances in previous frames. One reason often asserted for the superiority of 3D is that it is "illumination independent" whereas 2D appearance can be affected by illumination in various ways. The challenges in designing a robust visual tracking algorithm are caused by the presence of noise, occlusion, varying viewpoints, background clutter, and illumination changes [11,12]. To overcome these challenges, we a robust visual tracking framework by casting the tracking problem as finding a sparse approximation in a template subspace. It is true that 3D shape per se is illumination independent, in the sense that a given 3D shape exist the same independent of how it is illuminated. However, the sensing of 3D shape is generally not illumination independent changes in the illumination of a 3D-shape can greatly affect the shape description that is acquired by a 3D sensor. Sparse Bayesian learning is used in; online [2,5,10] multiple instance learning is used in to achieve robustness to occlusions and other image corruptions. A new tracker is proposed by bootstrapping binary classifiers with structural constraints, and the tracker is shown to be reliable in long sequence tracking.

8 III.

9 INCREMENTAL METHOD UNDER FACE RECOGNITION

In this section we review only the most relevant visual tracking work, focusing on algorithms that operate directly on grayscale images. An incremental method is:

? Sequentially one by one Compute and updates

10 ? Successively updating an earlier model as new observations

Number of incremental versions of LDA have been suggested, which can be applied to on-line learning tasks, an incremental version [5,10] of LDA, which includes a single new data point in each time step. A major limitation is the computational complexity of the method when the number of classes C is large, as the method involves an eigen-decomposition of $C \times C$ sized scatter matrices. Incremental linear discriminant analysis (ILDA) in its two forms: a sequential ILDA and a Chunk, ILDA. In experiments;

Inspiration for incremental LDA can be drawn from work on incremental PCA. Numerous algorithms have been developed to update eigenbases as more data samples arrive (Table-I). However, most methods assume zero mean in updating the eigenbases except where the update of the mean is handled correctly. In the methods, the size of the matrix to be eigendecomposed is reduced by using the sufficient spanning set (a reduced set of basis vectors spanning the space of most data variation). As the computation of the Eigen problem is cubic in the size of the respective scatter matrix, this update scheme is highly efficient. Similarly to the proposed tracker is essentially an eigentracker, where the eigen-space is adaptively learned and updated online. The method similarly takes a single new data point as input and suffers when C is large, introduced a scheme for updating the between-class and within-class scatter matrices. Linearly combines it in an optimal way into a stronger classifier, (5) An AdaBoost learning procedure is aimed at deriving X_{mi} and μ_{mi} ; so that an upper error bound is minimized, therefore, to produce a robust tracker, it is important to adapt the appearance model online, while tracking, to reflect these changes.

IV.

11 PROPOSED FRAMEWORK WORKING MECHANISM

In this Approach we help Sparse approximation is a key technique developed in engineering and the sciences which approximates an input signal, X_i , in terms of a "sparse" combination of fixed bases N . Main keys of sparse approximation is; ? High dimension data reduced to Low Samples.

12 ?

Matrix based Eigen value Decomposer.

13 ?

Comparative with PCA, LDA, etc.

Unlike many existing algorithms which are based upon online boosting, our framework makes use of SLDA based feature selection which aims to maximize the class-separation criterion. It relies on an optimization algorithm to infer the Maximum A-Posteriori (MAP) weights W that best reconstruct the signal, given the model. The Sparse LDA (SLDA) maximizes a generalized Eigen-value (generalized Rayleigh) quotient in a cardinality-constrained subspace (variable subset). Sparse LDA methods are preferable over regular LDA methods. In presented a MATLAB technique to compute optimal sparse linear discriminants using branch and bound approaches. Nevertheless, finding the globally optimal solutions for high dimensional data is computationally infeasible. ILDA instead tries to find a nearly optimal solution to this problem in a greedy way. This gives an exact formulation of sparse generalized [1,2] Eigen Value Decompositions and also suggests a simple post-processing step (variation renormalization) for improving continuous solutions. Although our algorithms performs well in the most of scenes, it may lose the target if the object experiences a large out-of-plane rotation video is recorded in an indoor environment with large illumination changes from the sunlight, our algorithm is not only suited for planar tracking like experiment but also is effective and efficient compared with ordinary tracking algorithms like Particle Filter and Ensemble Tracking, performance of our proposed object tracking algorithm is more promising to cope with various appearance changes and illumination variance. Some Computational efficiency tested experimentally as; In experimental purpose, we use Yale B face databases, Sony 16MP camera based image under Intel Quad 64-bit processor with 6GB of RAM, for MATLAB 7.0.1., and generated some critical results as; Table ?? : Complexity Factor of Figure ?? Both time and space complexity of the proposed incremental LDA are independent of the size (d_T and d_B); of the total sample set and the total number of classes. During ILDA learning, we need to find mean $O(n)$, variance and correlation ($O(2)$) for each feature.

14 V. CONCLUSION

In this paper we discuss why the face recognition rate is changed via different illumination invariant case under the optometry of camera or other input source is automatically changed depend the problems of light variant. Major idea is incrementally changed the AdaBoost based object detector can be trained to achieve a high detection performance for online face processing, recognition, detector efficiency, we devise a new edge orientation based features, which is approximately invariant to illumination variance through the theory proof. Besides, to reduce the amount of computation and increase the efficiency of particles, another preprocessed layer is added to cut the particles according to the difference between the average value of edge orientation in the particle region and

214 the original target region. It is obviously seen that our proposed algorithm achieves excellent results even under
large illumination variances. ¹ ²



Figure 1: Figure 2 :



Figure 2:

215

¹© 2012 Global Journals Inc. (US) Global Journal of Computer Science and Technology
²© 2012 Global Journals Inc. (US)

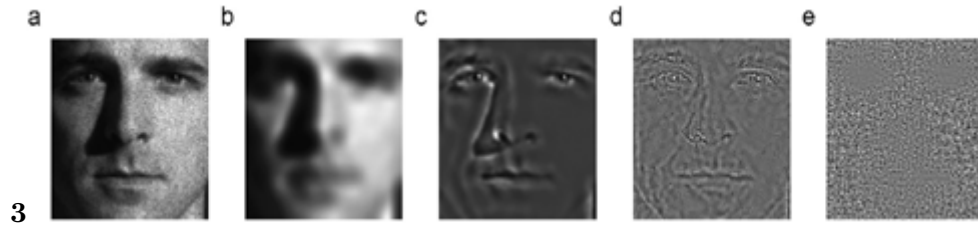


Figure 3: Figure 3 :

$$S_W = \sum_{i=1}^C \sum_{\mathbf{x} \in C_i} (\mathbf{x} - \mathbf{m}_i)(\mathbf{x} - \mathbf{m}_i)^T$$

Figure 4:

$$S_B = \sum_{i=1}^C n_i (\mathbf{m}_i - \mu)(\mathbf{m}_i - \mu)^T$$

56

Figure 5: Figure 5 :Figure 6 :

1

Extraction.(Input Same) Eigenvalues determined using Liu's method	Eigenvalues determined by our experiment
1.00000000e+00	3.31404839e+04
1.00000000e+00	2.39240384e+04
1.00000000e+00	1.67198579e+04
1.00000000e+00	1.01370563e+04
1.00000000e+00	6.88308959e+03
1.00000000e+00	7.41289737e+03
1.00000000e+00	2.70253079e+03
1.00000000e+00	5.53323313e+03
1.00000000e+00	3.46817376e+03

Figure 6: Table 1 :

216 [Pattern Analysis And Machine Intelligence (2012)] , *Pattern Analysis And Machine Intelligence* February,
217 2012. 34 (2) .

218 [Zhang and Zhang (2010)] ‘A Survey of Recent Advances in Face Detection’. C Zhang , Z Zhang . MSR-TR-
219 2010-66. *Microsoft Technical Report* June 2010.

220 [D’eniz ()] ‘An Incremental Learning Algorithm for Face Recognition’. O D’eniz , M . *Biometric Authentication*,
221 2002. Springer. 2359. (Castrill’on and others)

222 [Yang et al. (2002)] ‘Detecting faces in images: A survey’. M.-H Yang , D J Kriegman , N Ahuja . *IEEE Trans.*
223 *Pattern Anal. Mach. Intell* Jan. 2002. 24 (1) p. .

224 [Xie et al. ()] ‘Extraction of illumination invariant facial features from a single image using nonsubsampling
225 contourlet transform’. X Xie , J Lai , Others . *Pattern Recognition* 2010. Elsevier. 43.

226 [S. Z. Li A. K. Jain (ed.) ()] *Handbook of Face Recognition*, S. Z. Li & A. K. Jain (ed.) 2011. Springer.

227 [Li and Chu (2007)] ‘Illumination Invariant Face Recognition Using Near-Infrared Images’. S-Z Li , R-F Chu .
228 *IEEE Transactions on Pattern Analysis And Machine Intelligence* April 2007. 29 (4) .

229 [Kim et al. ()] ‘Incremental Linear Discriminant Analysis Using Sufficient Spanning Sets and Its Applications’.
230 T.-K Kim , ? B Stenger , ? J Kittler , R Cipolla . *International Journal Computer Vision* 2010. Springer.

231 [Paisitkriangkrai et al. (2011)] ‘Incremental Training of a Detector Using Online Sparse Eigendecomposition’. S
232 Paisitkriangkrai , C Shen , J Zhang . *IEEE, Transactions on Image Processing*, January 2011. 20.

233 [Wu (2011)] *Offline and Online Adaboost for Detecting Anatomic Structures*, H Wu . August 2011. Arizona State
234 University (MS Thesis)

235 [Grabner and Bischof ()] ‘On-line Boosting and Vision’. H Grabner , H Bischof . *Austrian Joint Research Project*
236 *Cognitive Vision under projects S9103-N04*, 2004.

237 [Viola and Jones ()] ‘Robust real-time face detection’. P Viola , M J Jones . *Int. J. Comput. Vis* 2004. 57 (2) p. .

238 [Xing and Li ()] *Study on Wavelet Transformation-based Low Illumination & High Dirt Face Detection Algorithm*,
239 S Xing , H , X-G Li . 2011. IEEE.

240 [Wagner et al.] ‘Toward a Practical Face Recognition System: Robust Alignment and Illumination by Sparse
241 Representation’. J Wagner , A Wright , Z Ganesh , H Zhou , Yi Mobahi , Ma . *IEEE Transactions on*

242 [Zhao and Chellappa ()] W Zhao , R Chellappa . *Face Processing: Advanced Modeling and Methods*, 2006.
243 Elsevier.